


Data Sheet LINAX®

Edition 1 December 2025

LINAX® Linear Motor Axes 4 Types

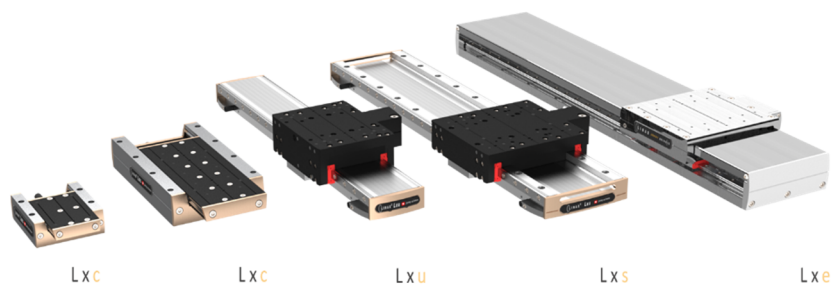

Lxc, c = compact
Lxu, u = universal
Lxs, s = shuttle
Lxe, e = exclusive

Highlights

Compact dimensions, high precision

Positioning accuracy optical $\pm 1.5\mu\text{m}$,
 resolution $1\mu\text{m}$ or $\pm 500\text{nm}$,
 resolution 100nm

Positioning accuracy magnetic $\pm 5\mu\text{m}$,
 resolution $1\mu\text{m}$ (for Lxu and Lxs only)

Modular system with strokes from
 44-2000mm

Peak forces from 24N – 300N

High cycle rates with velocities up to 4m/s
 due to the linear motor

FORCETEQ® basic/pro force control, force
 limitation, force monitoring with XENAX® Xvi
 servo controller

Overview


The construction of the very compact LINAX®

Lxc (compact) types is based on the patented mono-bloc design. The linear motor coils are located in the mono-bloc and the magnets and the glass scale are on the slider. The magnets are moving while the coils remain stationary. No moving cables and cable chains result which translates into longer life span.



LINAX® Lxc 44F08 with Weight compensation

The Lxu (universal) types are real „all-rounders“. There are three mounting possibilities: mounting to the slider, to the ground plate or to the front face. Also interesting are the four long holes through the carriage slider. This allows for the direct back to back mounting of two Lxu sliders.

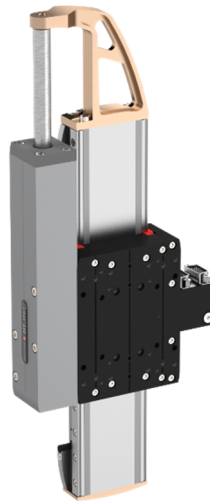

LINAX® Lxu xxF60 with Weight compensation

The two Lxs (shuttle) F60 and F120 models are designed for long travel distances up to 1600mm as the main axis. The low-profile design with an "embedded" linear motor is advantageous. As a result, the height is reduced to only 38mm for the Lxs F60 and only 45mm for the Lxs F120. The robust, widely spaced guides can accommodate high torque from cantilever axes.



LINAX® Lxs 800F60, with multiple carriage slider for highly integrated machine concepts

The LINAX® Lxe (exclusive) models have a protective cover that is passed through the carriage slider of the linear motor. The result is a flat and elegant geometry for easy cleaning. This Lxe series is predestined for medical and clean room applications.



LINAX® Lxe 550F40, with protective cover

By using Jenny Science drive components, you can build your machines and devices more compactly and efficiently, while the FORCETEQ® force measurement technology ensures integrated quality control.

The result shows: Reduced space requirements, increased productivity, controlled quality, and decreased energy costs.

Alois Jenny
Jenny Science AG

Content

| | |
|--|-----------|
| 1 Code for LINAX® Types | 7 |
| 2 LINAX® Lxc F08/F10/F40 | 7 |
| 2.1 External Dimensions LINAX® Lxc | 7 |
| 2.2 Cable outlet & bending radius | 8 |
| 2.3 Dynamics LINAX® Lxc | 8 |
| 2.3.1 Power Supply, Speed Lxc | 8 |
| 2.4 Precision LINAX® Lxc | 9 |
| 2.4.1 Positioning Lxc | 9 |
| 2.4.2 Guidings of Slider Lxc | 10 |
| 2.4.3 Typical measurement results LINAX® Lxc 230F10 of series production | 11 |
| 2.5 Load parameters of Guides Lxc | 12 |
| 2.6 Dimensions Lxc F08/10 | 13 |
| 2.6.4 Installation Dimensions LINAX® Lxc 44F08 | 13 |
| 2.6.5 Installation Dimensions LINAX® Lxc 85F10 | 14 |
| 2.6.6 Installation Dimensions LINAX® Lxc 135F10 | 15 |
| 2.6.7 Installation Dimensions LINAX® Lxc 230F10 | 16 |
| 2.7 Dimensions Lxc F40 | 17 |
| 2.7.1 Installation Dimensions LINAX® Lxc 80F40 | 17 |
| 2.7.2 Installation Dimensions LINAX® Lxc 176F40 | 18 |
| 2.7.3 Installation Dimensions LINAX® Lxc 272F40 | 19 |
| 3 LINAX® Lxu F60 | 20 |
| 3.1 External Dimensions LINAX® Lxu F60 | 20 |
| 3.2 Dynamics LINAX® Lxu | 21 |
| 3.2.1 Slider in Motion | 21 |
| 3.2.2 Ground Plate in Motion | 21 |
| 3.2.3 Power Supply, Speed Lxu | 21 |
| 3.3 Precision LINAX® Lxu | 22 |
| 3.3.1 Positioning Lxu | 22 |
| 3.3.2 Guidings of Slider Lxu | 23 |
| 3.3.3 Typical measurement results LINAX® Lxu 320F60 of series production | 24 |
| 3.4 Stress Values of Guides Lxu | 24 |
| 3.5 Installation Dimensions LINAX® Lxu 40 – Lxu 320 | 25 |
| 4 LINAX® Lxs F60 | 27 |
| 4.1 External Dimensions Lxs F60 | 27 |
| 4.2 Dynamics LINAX® Lxs F60 | 28 |
| 4.2.1 Power Supply, Speed Lxs F60 | 28 |
| 4.3 Precision LINAX® Lxs | 29 |
| 4.3.1 Positioning Lxs | 29 |
| 4.3.2 Guidings of Slider Lxs F60 | 30 |
| 4.3.3 Typical measurement results LINAX® Lxs 600F60 of series production | 31 |
| 4.4 Load parameters of Guides Lxs | 31 |

| | |
|---|-----------|
| 4.5 Installation Dimensions LINAX® Lxs 160 – Lxs 1600 | 32 |
| 5 LINAX® Lxs F120 | 35 |
| 5.1 External Dimensions Lxs F120 | 35 |
| 5.2 Dynamics LINAX® Lxs F120 | 36 |
| 5.2.1 Power supply voltage versus speed Lxs F120 | 36 |
| 5.3 Precision LINAX® Lxs F120 | 37 |
| 5.3.2 Absolute positioning Lxs F120 | 37 |
| 5.3.3 Carriage guide Lxs F120 | 38 |
| 5.3.4 Typical measurement results LINAX® Lxs 600F120 of series production | 39 |
| 5.4 Load parameters of Guides Lxs F120 | 39 |
| 5.5 Installation dimensions LINAX® Lxs 80F120 – Lxs 2000F120 | 40 |
| 6 LINAX® Lxe F40 | 43 |
| 6.1 External Dimensions LINAX® Lxe F40 | 43 |
| 6.2 Dynamics LINAX® Lxe | 44 |
| 6.2.1 Power Supply, Speed Lxe | 44 |
| 6.3 Precision LINAX® Lxe | 45 |
| 6.3.1 Positioning Lxe | 45 |
| 6.3.2 Guidings of Slider Lxe | 46 |
| 6.4 Stress Values of Guides Lxe | 46 |
| 6.5 Dimensions LINAX® Lxe | 47 |
| 6.5.1 Installation Dimensions LINAX® Lxe 250F40 | 48 |
| 6.5.2 Installation Dimensions LINAX® Lxe 400F40 | 48 |
| 6.5.3 Installation Dimensions LINAX® Lxe 550F40 | 48 |
| 6.5.4 Installation Dimensions LINAX® Lxe 800F40 | 49 |
| 6.5.5 Installation Dimensions LINAX® Lxe 1000F40 | 49 |
| 7 Weight Compensation | 50 |
| 7.1 Weight Compensation STEP CAD Data | 50 |
| 7.2 Weight Compensation Lxc 44F08 | 50 |
| 7.3 Weight Compensation Lxc 85F10, | 50 |
| Lxc 80F40, Lxc 176F40 | 50 |
| 7.4 Weight Compensation Lxu 40F60, Lxu 80F60, Lxu 160F60 | 51 |
| 7.5 Weight Compensation Lxs F120 | 52 |
| 8 Front Flange Connections LINAX® Lxu | 53 |
| 9 Installation, Important Instructions | 54 |
| 9.1 Flatness for Mounting on Ground Plate | 54 |
| 9.2 Flatness for Mounting on Slider | 54 |
| 9.3 Flatness Practical Test | 54 |
| 9.4 Power Supply | 54 |
| 9.5 Earthing concept | 55 |
| 10 Maintenance, Lifespan | 56 |
| 10.1 Lubrication of LINAX® Lxc Types | 56 |
| 10.2 Lifespan Expectations LINAX® Lxc Types | 56 |
| 10.3 Lubrication of LINAX® Lxu, Lxs, Lxe Types | 57 |

| | |
|--|-----------|
| 10.4 Lifespan Expectations Lxu, Lxs, Lxe Types | 57 |
| 10.5 Lifespan Extending Measures | 57 |
| 10.6 Cleaning Glass Scale | 58 |
| 11 Safety, Environment | 59 |
| 11.1 Safety with XENAX® Servocontroller | 59 |
| 11.2 Environment Conditions | 59 |

1 Code for LINAX® Types


Lxc 85F10

| Lx | c | 85 | 10 |
|-------------|--|---------------------------------|--|
| Lx = LINAX® | c = compact u = universal s = shuttle e = exclusive | 85 = 85mm max. net stroke | 10 = 10N Nominal force 100% duty cycle |


2 LINAX® Lxc F08/F10/F40

2.1 External Dimensions LINAX® Lxc


| LINAX® | Lxc 44F08 | Lxc 85F10 | Lxc 135F10 | Lxc 230F10 |
|--------|--------------|--------------|---------------|---------------|
| L [mm] | 78 | 144 | 194 | 290 |

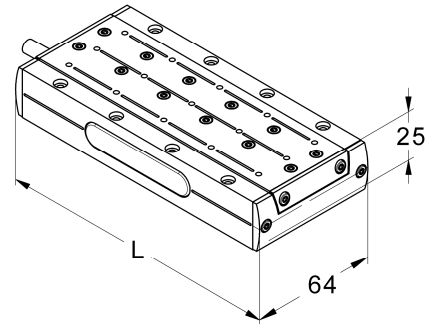

| LINAX® | Lxc 80F40 | Lxc 176F40 | Lxc 272F40 |
|--------|--------------|---------------|---------------|
| L [mm] | 169 | 265 | 361 |

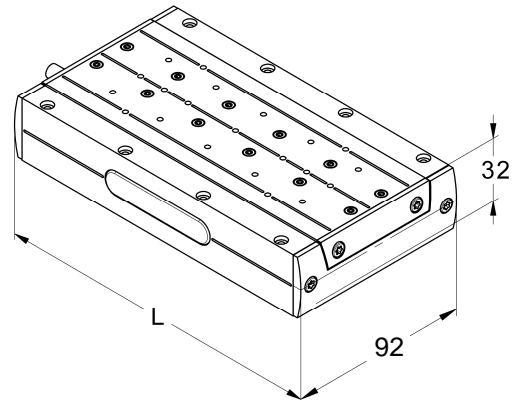


Lxc absolute zero point according to REFERENCE:
Slider extended towards the connection cable

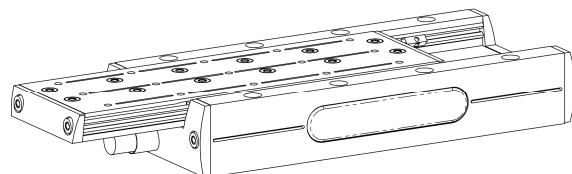

2.2 Cable outlet & bending radius

For permanently moving cables, a minimum bending radius of 48mm (R_{moving}) must be observed. The cable must be fixed before and after the moving section on the outer jacket. For fixed installations, a one-time bending radius of 20mm (R_{fixed}) must be respected. The cable is not designed for torsional stress, but achieves more than 1million cycles at a torsion of $\pm 90^\circ$ over a length of 1 m.

If the bend begins directly at the cable outlet, the cable must be routed straight over a defined length before any bending or movement is allowed.

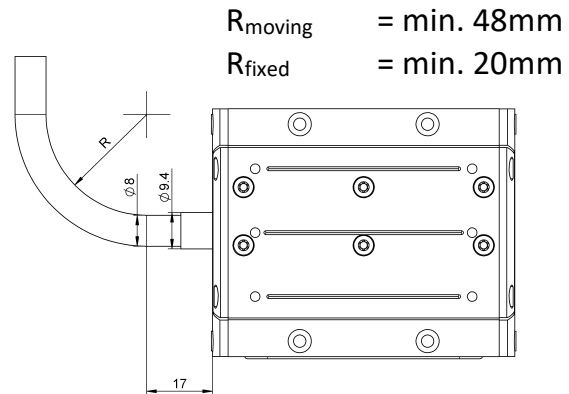


2.3 Dynamics LINAX® Lxc

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel Time/stroke [ms] | Weight Slider [g] | Weight Geko [g] | Weight Total [g] |
|------------|-------------|---------------------|-------------------|--|------------------------------|-------------------|-----------------|------------------|
| Lxc 44F08 | 44 | 8/24 | 2.0 | 120 | 40 | 130 | 90 | 350 |
| Lxc 85F10 | 85 | 10/30 | 2.5 | 85 | 70 | 230 | 180 | 650 |
| Lxc 135F10 | 135 | 10/30 | 2.8 | 60 | 95 | 320 | - | 880 |
| Lxc 230F10 | 230 | 10/30 | 3.2 | 45 | 145 | 450 | - | 1200 |
| Lxc 80F40 | 80 | 40/114 | 2.0 | 100 | 60 | 520 | 335 | 1470 |
| Lxc 176F40 | 176 | 40/114 | 2.5 | 90 | 100 | 750 | 530 | 2150 |
| Lxc 272F40 | 272 | 40/114 | 2.8 | 75 | 140 | 1050 | - | 2800 |


All values only valid with XENAX® Xvi and 20% S-Curve

2.3.1 Power Supply, Speed Lxc

Lxc F10 Power Supply, Force, Speed

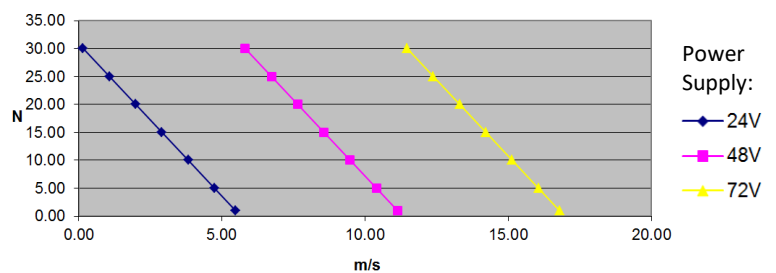

Lxc F40 Power Supply, Force, Speed

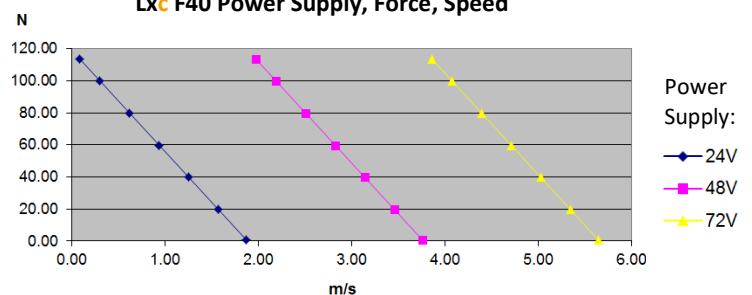


2.4 Precision LINAX® Lxc

2.4.1 Positioning Lxc


| | |
|--|---|
| Standard resolution of optical measuring scale | 1µm / counter increment |
| Repeatability | < +/-1.5µm |
| Optional optical measuring scale with high resolution | 100nm / counter increment |
| Repeatability | < +/-400nm |
| Linear expansion optical measuring scale | 8.5µm/m/°C |
| Reference | Automatic calculation of the absolute position through the distance coded reference marks, max 10mm, direction of reference can be selected. The reference has to be completed only once after powering on the logic power (24V). The absolute position will be stored until the logic power is turned off (XENAX® Servo controller). |
| Mechanical zero point absolute | It is located 1.5mm before the mechanical limit. This is where the slider is positioned on the right end while the cable case is in the front of the user. |
| Correction table for position errors with Servo controller Xvi 48V8/75V8/75V8S | The XENAX® Servo controller offers the possibility to correlate the encoder position with the actual position. |

Position accuracy optical 1µm
150mm over measuring system

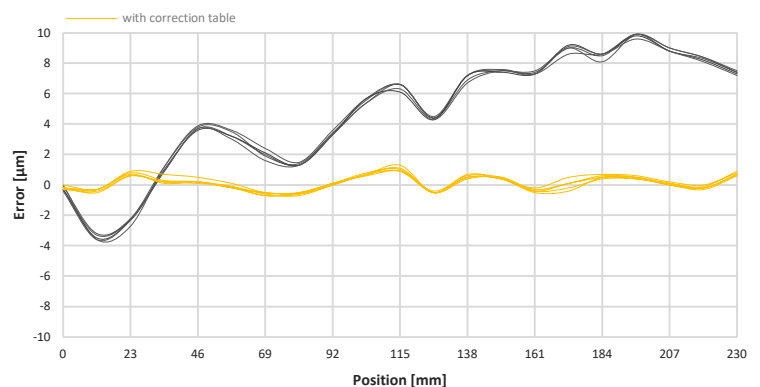

2.4.2 Guidings of Slider Lxc

Cross roller bearings with are used for the LINAX® Lxc linear motor axes. The cross roller bearings are installed in cages and are equipped with forced centering. This construction is very robust and reliable (>350Mio cycles with F08/F10). The LINAX® Lxc linear motor axes have the following tolerances. These data is based on measures with linear motors free of load.

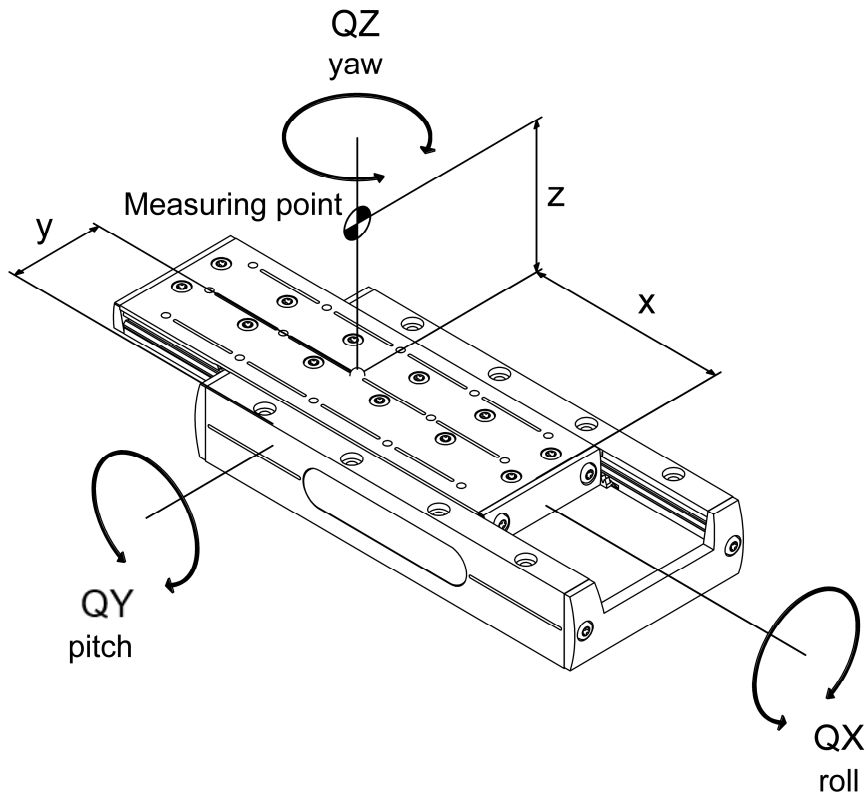


| LINAX® | Running Accuracy horizontal EYX [μm] | Running Accuracy vertical EZX [μm] | Tilt Error QX (roll) [arcsec] | Tilt Error QY (pitch) [arcsec] | Tilt Error QZ (yaw) [arcsec] | Tolerance Constr. height [mm] |
|------------|--|--|-------------------------------------|--------------------------------------|------------------------------------|-------------------------------------|
| Lxc 44F08 | ±5 | ±5 | ±15 | ±30 | ±20 | ±0,1 |
| Lxc 85F10 | ±7 | ±7 | ±20 | ±35 | ±25 | ±0,1 |
| Lxc 135F10 | ±10 | ±10 | ±20 | ±40 | ±30 | ±0,1 |
| Lxc 230F10 | ±12 | ±12 | ±20 | ±50 | ±35 | ±0,1 |
| Lxc 80F40 | ±8 | ±8 | ±20 | ±30 | ±30 | ±0,1 |
| Lxc 176F40 | ±10 | ±10 | ±20 | ±35 | ±35 | ±0,1 |
| Lxc 272F40 | ±12 | ±12 | ±20 | ±40 | ±40 | ±0,1 |

2.4.3 Typical measurement results LINAX[®] Lxc 230F10 of series production

Position accuracy

| | |
|--|-----------------------|
| Resolution optical: | 1 μm |
| Absolute accuracy: | $\pm 2.5 \mu\text{m}$ |
| Repeatability forward: | 0.8 μm |
| Repeatability backward: | 1.0 μm |
| Repeatability bi-directional: | 1.3 μm |
| Position accuracy 25mm over measuring system | |

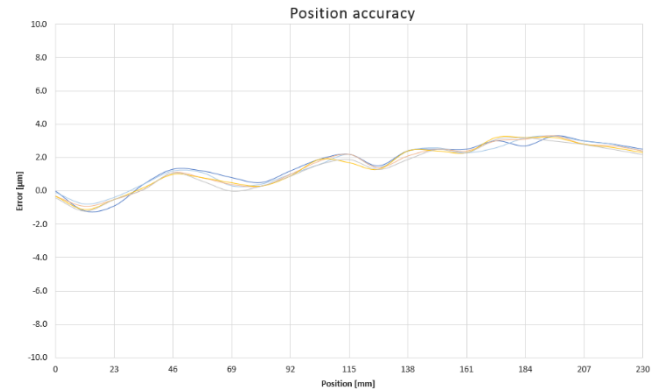

Tilt error

| | |
|-----------|-----------------|
| QX roll: | ± 9.5 asec |
| QY pitch: | ± 10.3 asec |
| QZ yaw: | ± 9 asec |




2.5 Load parameters of Guides Lxc

| LINAX® | Mx max [Nm] | Fy max [N] Fz max [N] | My max [Nm] Mz max [Nm] |
|------------|----------------|--------------------------|----------------------------|
| Lxc 44F08 | 17 | 787 | 11 |
| Lxc 85F10 | 37 | 1722 | 43 |
| Lxc 135F10 | 47 | 2181 | 66 |
| Lxc 230F10 | 49 | 2296 | 95 |
| Lxc 80F40 | 129 | 4080 | 133 |
| Lxc 176F40 | 165 | 5236 | 230 |
| Lxc 272F40 | 186 | 5916 | 328 |






Besides adhering to the individual maximal loads, the following equation must comply if there are multiple forces and moments acting simultaneously on the linear motor:

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

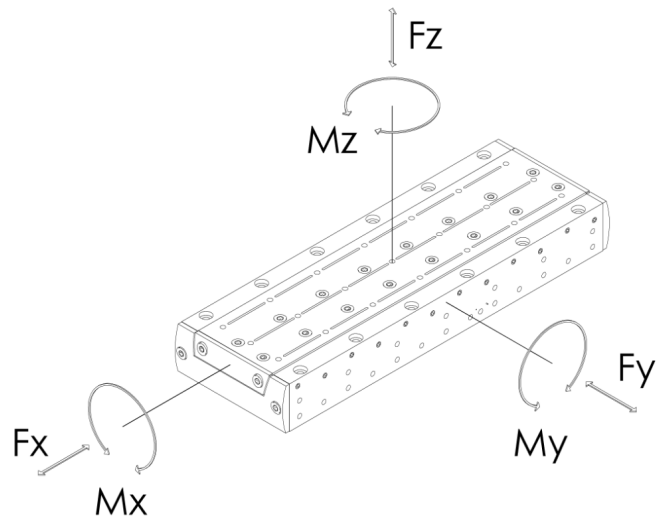


2.6 Dimensions Lxc F08/10


2.6.4 Installation Dimensions LINAX® Lxc 44F08

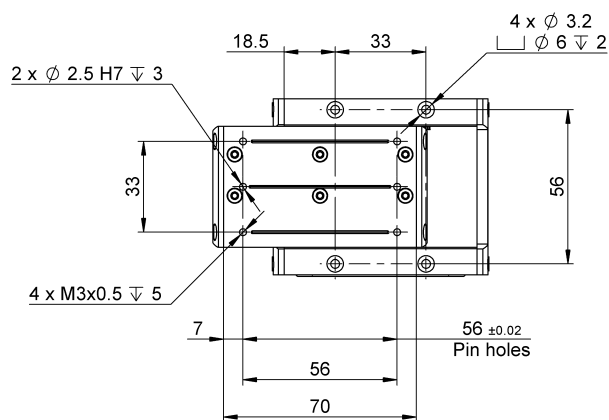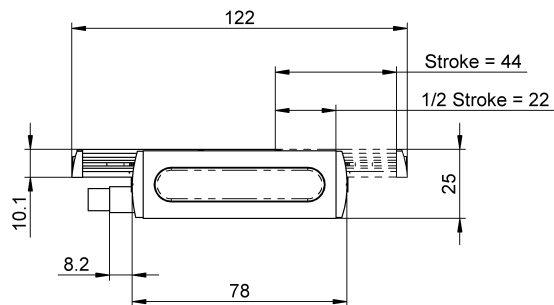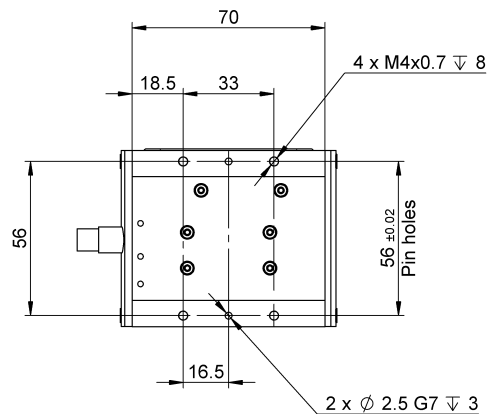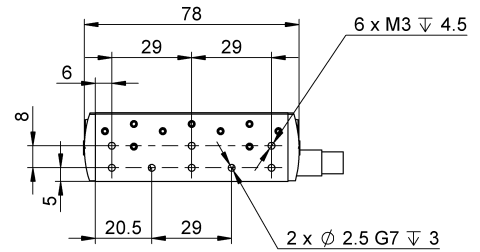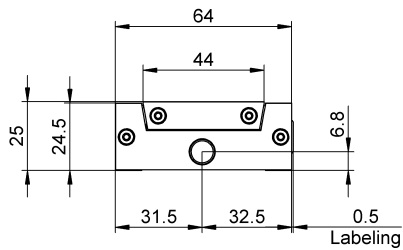

2.6.5 Installation Dimensions LINAX® Lxc 85F10

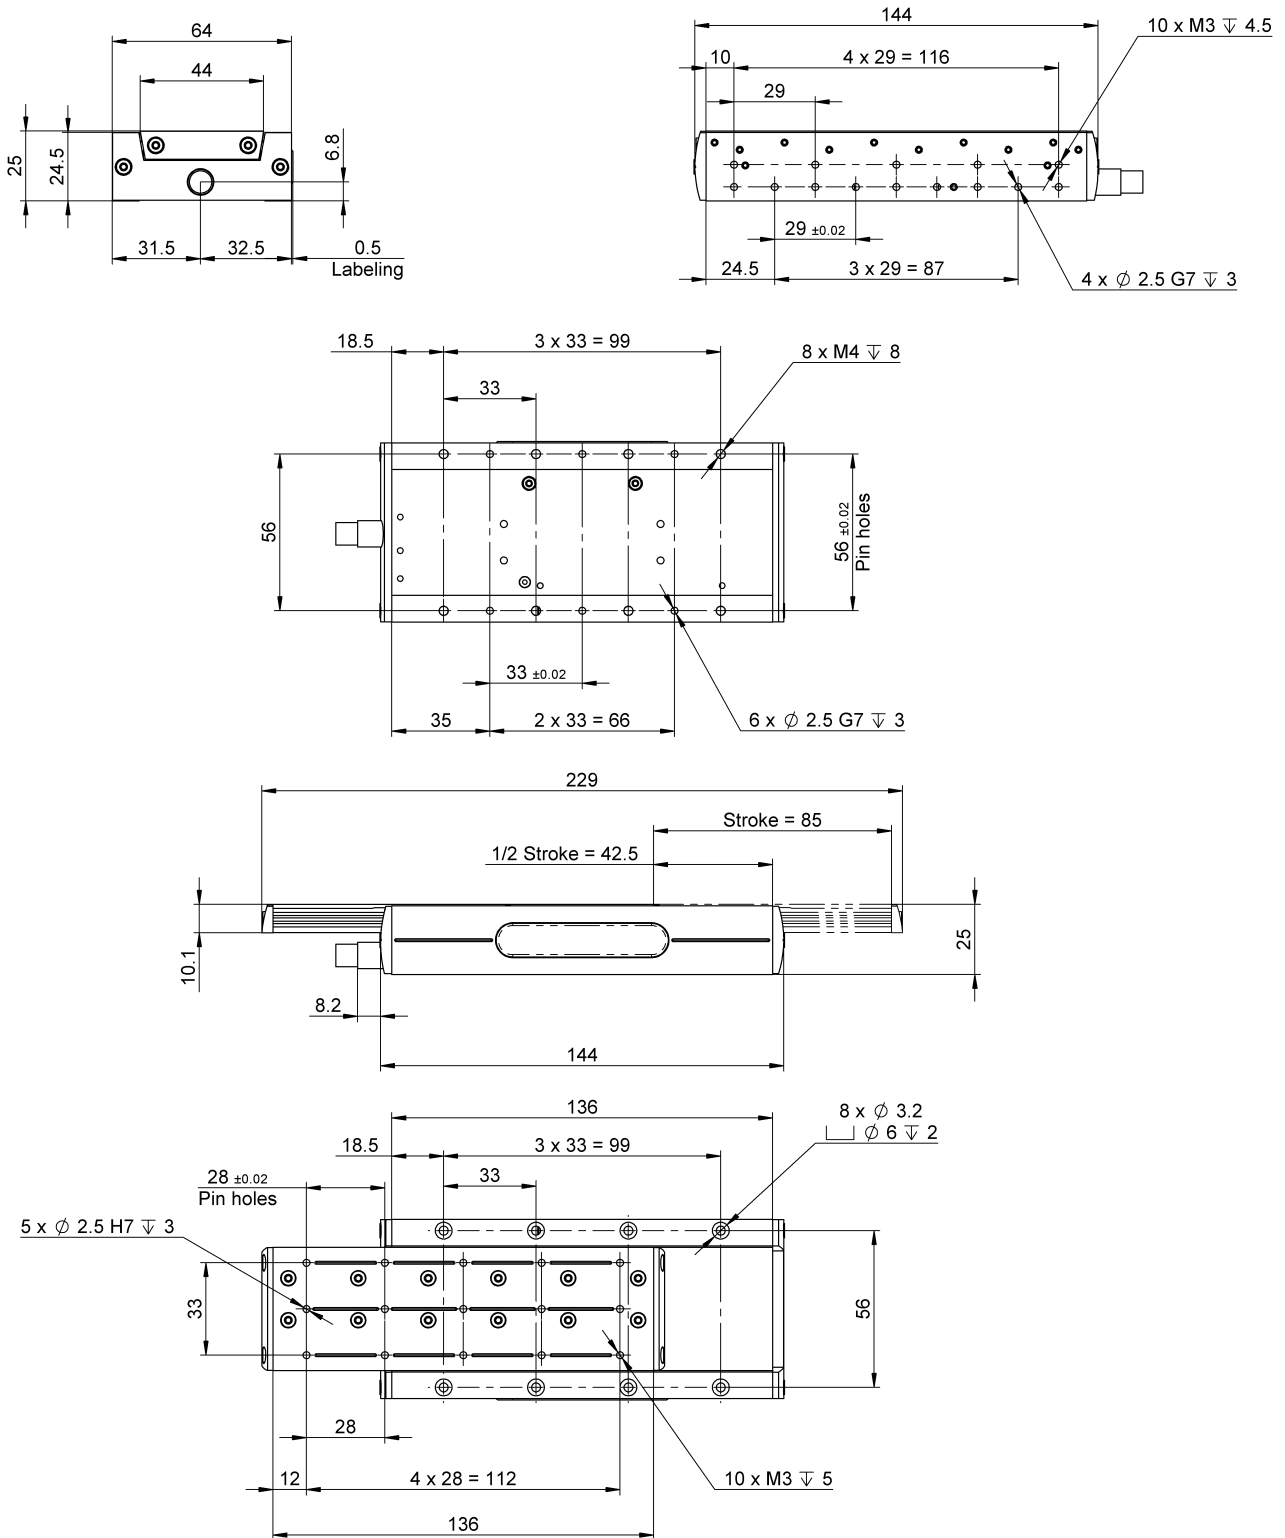

2.6.6 Installation Dimensions LINAX® LxC 135F10

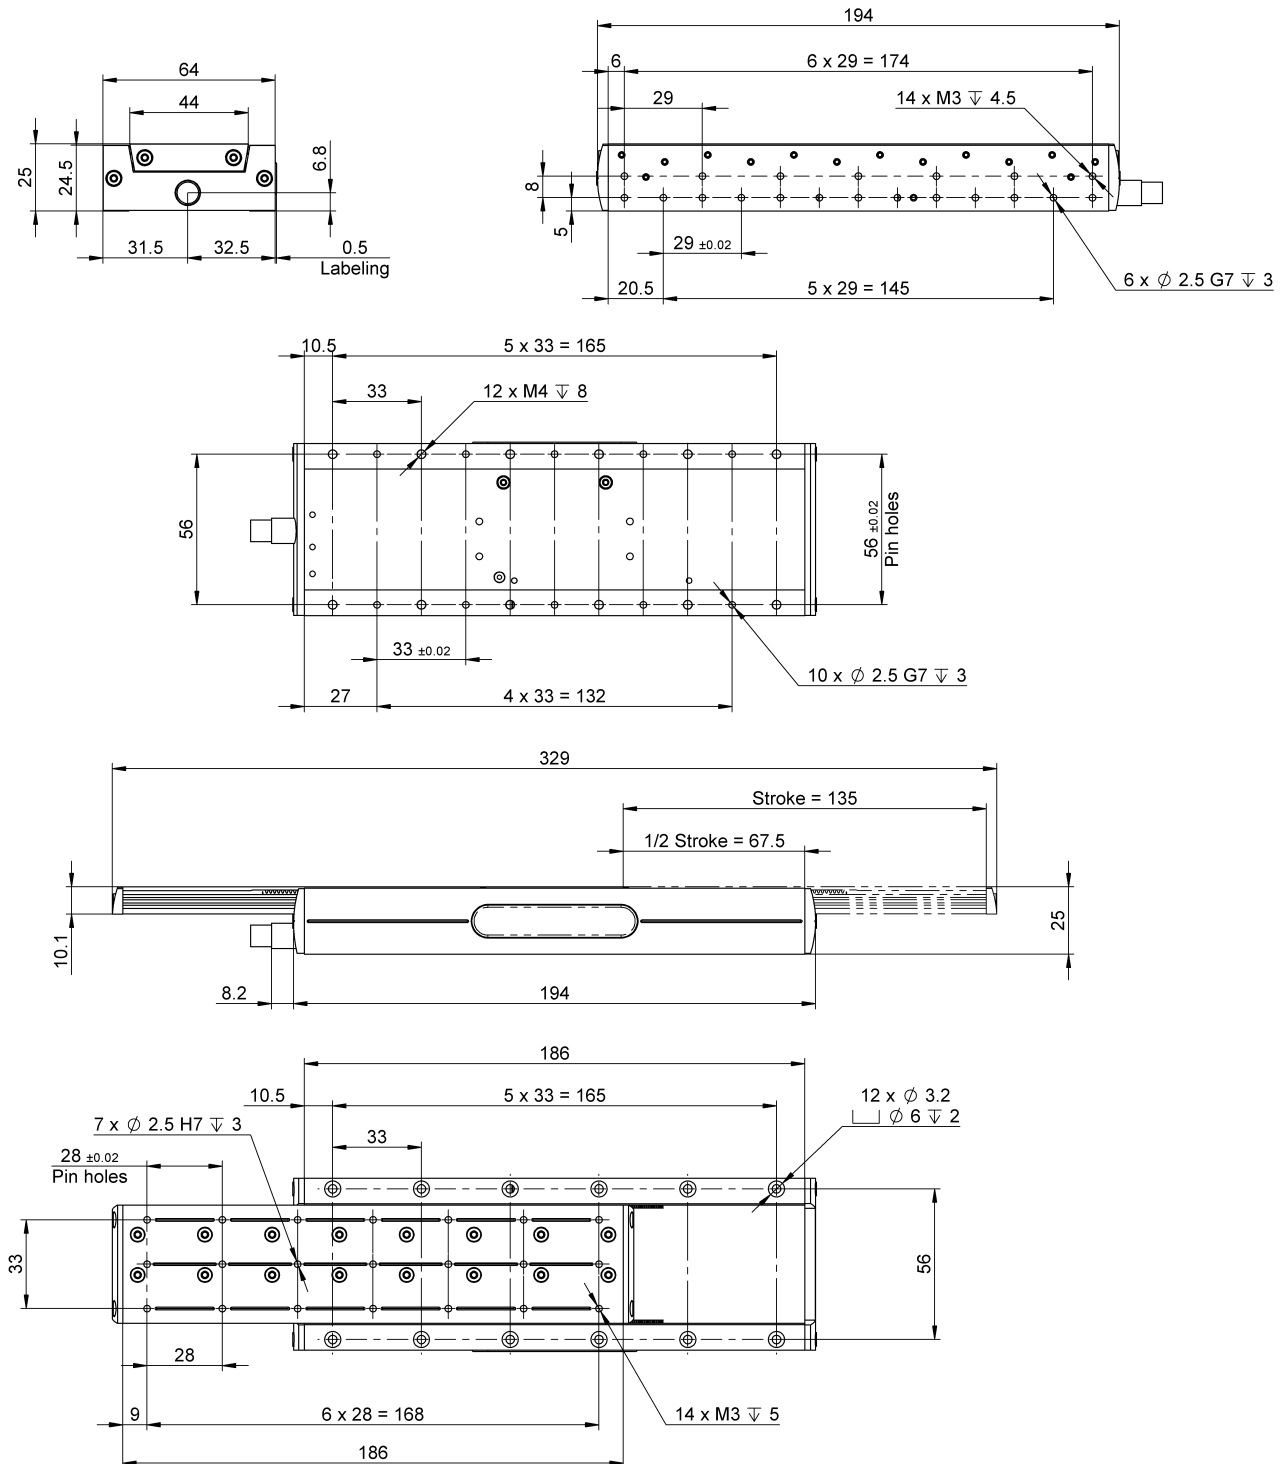

Technical drawing of a mechanical assembly, showing four views: front, top, side, and detail.

Front View (Top): Shows a rectangular component with a total width of 290 mm and a height of 25 mm. The top edge has a 9 mm wide section. The main body has a width of 264 mm (8 x 33) and a height of 33 mm. The bottom edge has a 34 mm wide section. The total length is 231 mm (7 x 33). The component features 18 x M3 ∇ 4.5 holes and 8 x ϕ 2.5 G7 ∇ 3 holes.


Top View (Middle): Shows a rectangular component with a total width of 56 mm and a height of 25.5 mm. The main body has a width of 231 mm (7 x 33) and a height of 33 mm. The bottom edge has a 42 mm wide section. The total length is 198 mm (6 x 33). The component features 16 x M4 ∇ 8 holes and 14 x ϕ 2.5 G7 ∇ 3 holes. The distance between the holes is 33 \pm 0.02 mm.

Side View (Bottom): Shows a rectangular component with a total width of 520 mm and a height of 25 mm. The main body has a width of 290 mm and a height of 8.2 mm. The component features 9 x ϕ 2.5 H7 ∇ 3 holes and 16 x ϕ 3.2 ∇ 6 ∇ 2 holes. The distance between the holes is 28 \pm 0.02 mm. The component has a stroke of 230 mm and a 1/2 stroke of 115 mm.


Detail View (Bottom): Shows a rectangular component with a total width of 282 mm and a height of 33 mm. The main body has a width of 224 mm (8 x 28) and a height of 29 mm. The component features 18 x M3 ∇ 5 holes and 9 x ϕ 2.5 H7 ∇ 3 holes. The distance between the holes is 28 \pm 0.02 mm.

2.7 Dimensions Lxc F40


2.7.1 Installation Dimensions LINAX® Lxc 80F40

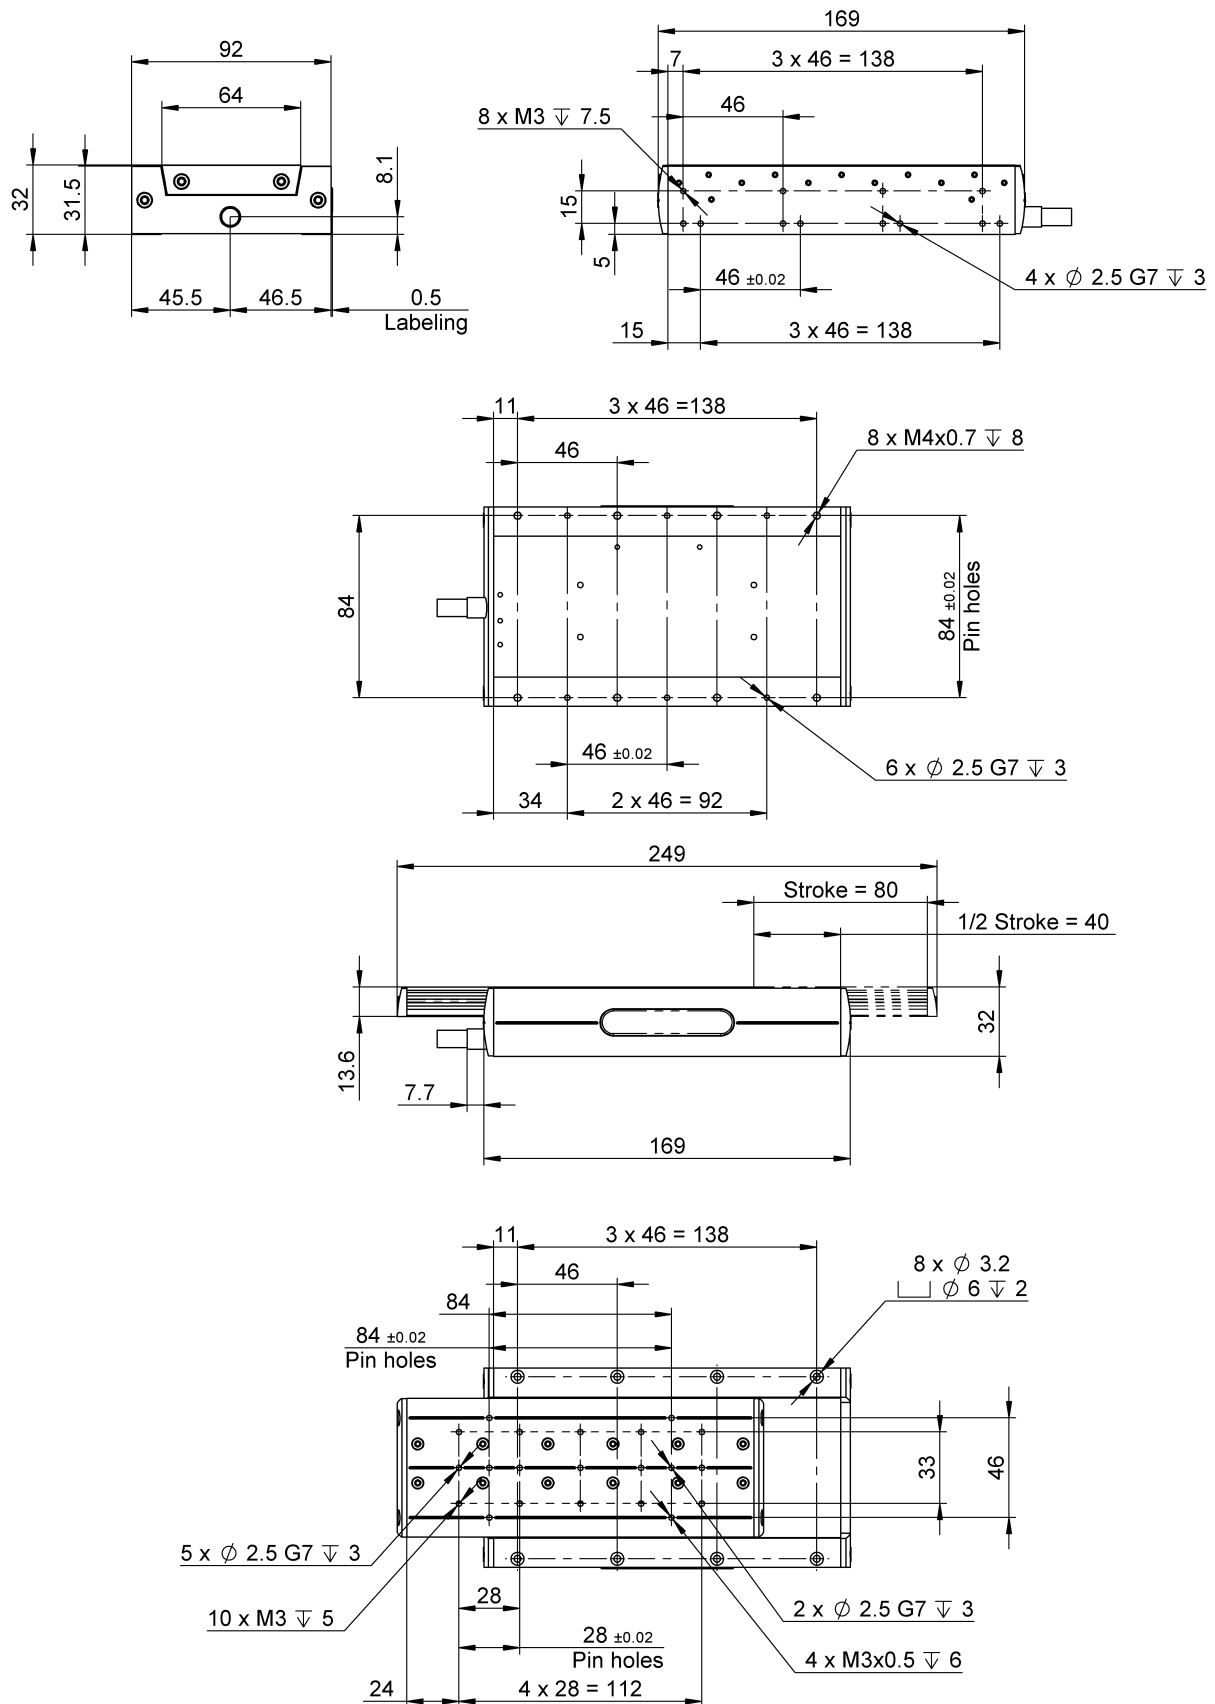

2.7.2 Installation Dimensions LINAX® Lxc 176F40

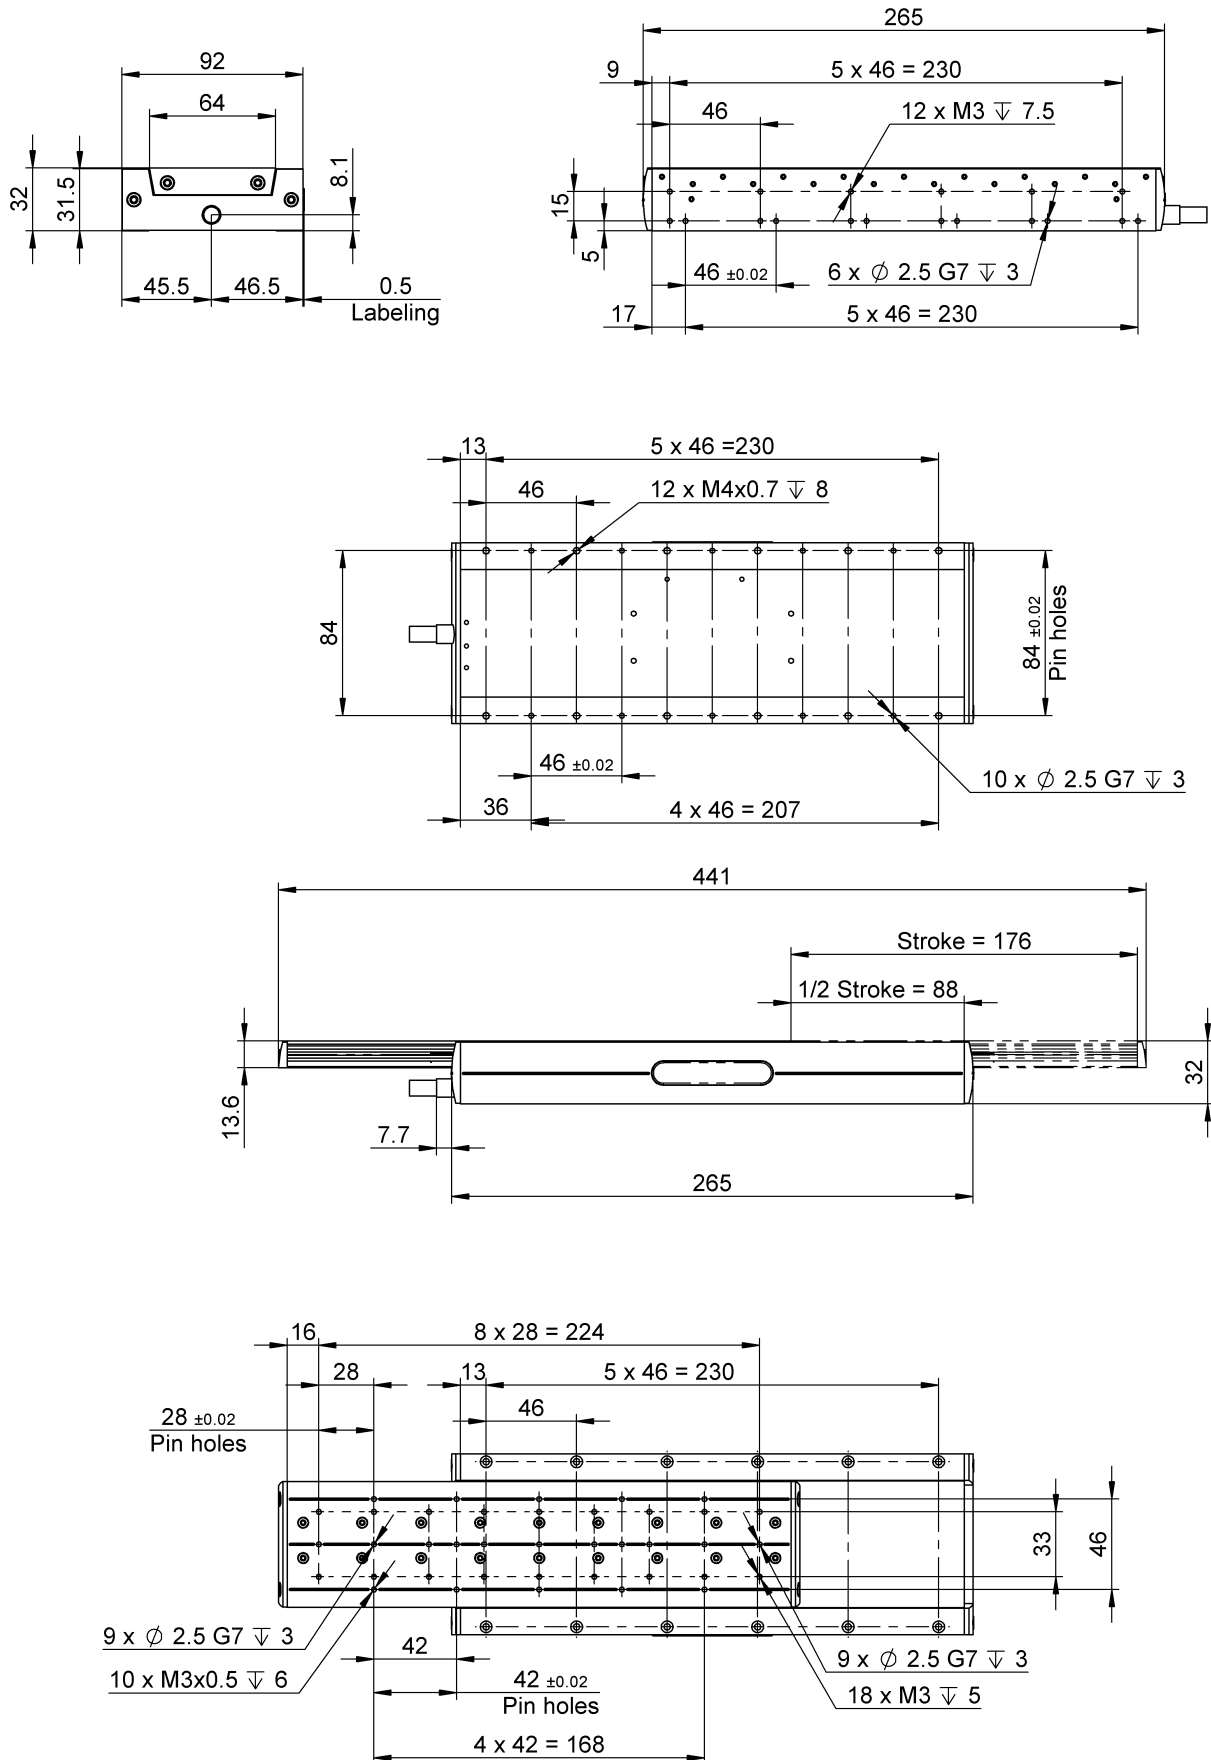



2.7.3 Installation Dimensions LINAX® Lxc 272F40

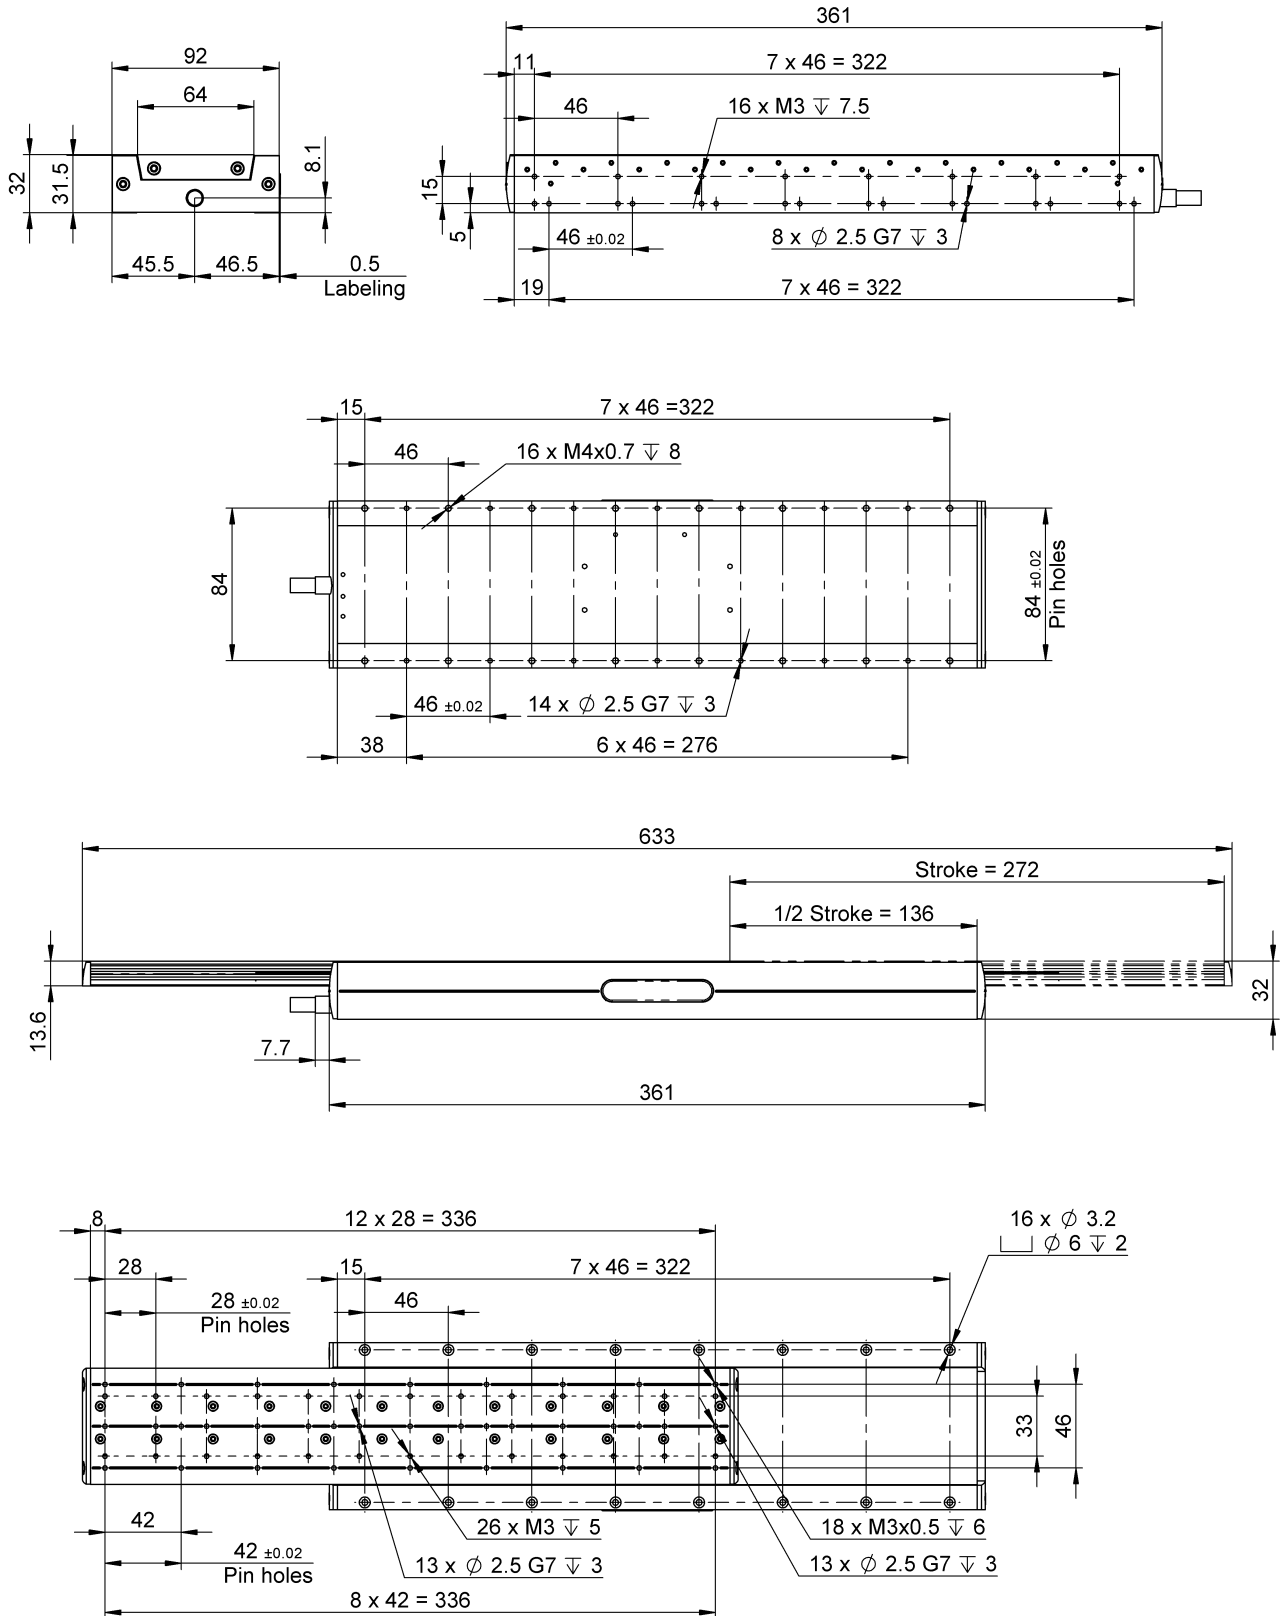


3 LINAX® Lxu F60

3.1 External Dimensions LINAX® Lxu F60


| LINAX® Lxu | L [mm] |
|------------|--------|
| Lxu 40F60 | 170 |
| Lxu 80F60 | 210 |
| Lxu 160F60 | 290 |
| Lxu 240F60 | 370 |
| Lxu 320F60 | 450 |

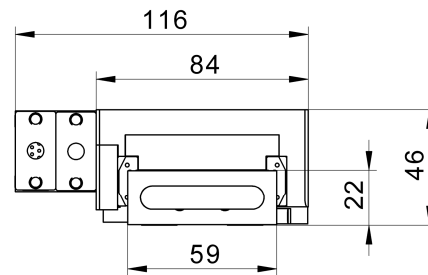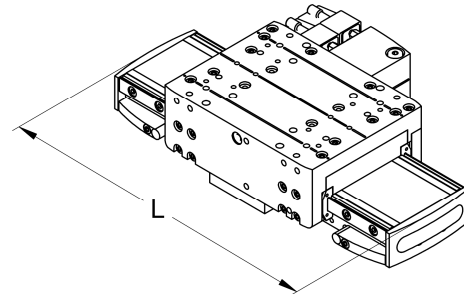

Lxs and Lxu
Rotary connector case in 90° pattern
Default cable connector directed to the right

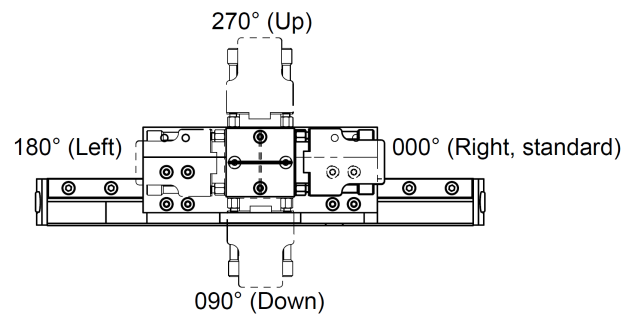

Lxu absolute zero point according to REFERENCE:
Slider extended towards the connection cable

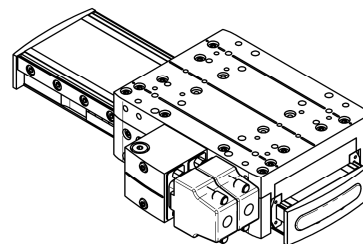

3.2 Dynamics LINAX® Lxu

3.2.1 Slider in Motion

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel time/stroke [ms] | Weight Slider [g] | Weight comp. | Weight Total [g] |
|------------|----------------|------------------------|----------------------|---|------------------------------------|----------------------|-----------------|---------------------|
| Lxu 40F60 | 40 | 60/180 | 2.0 | 120 | 40 | 950 | 360 | 1700 |
| Lxu 80F60 | 80 | 60/180 | 2.5 | 120 | 55 | 950 | 360 | 1900 |
| Lxu 160F60 | 160 | 60/180 | 3.0 | 120 | 80 | 950 | 590 | 2200 |
| Lxu 240F60 | 240 | 60/180 | 3.5 | 120 | 100 | 950 | 820 | 2500 |
| Lxu 320F60 | 320 | 60/180 | 3.8 | 120 | 115 | 950 | - | 2900 |


All values only valid with XENAX® Xvi and 20% S-Curve

3.2.2 Ground Plate in Motion

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel time/stroke [ms] | Weight Ground Plate [g] | Weight comp. | Weight Total [g] |
|------------|----------------|------------------------|----------------------|---|------------------------------------|----------------------------|-----------------|---------------------|
| Lxu 40F60 | 40 | 60/180 | 2.0 | 160 | 35 | 750 | 350 | 1700 |
| Lxu 80F60 | 80 | 60/180 | 2.5 | 120 | 55 | 950 | 350 | 1900 |
| Lxu 160F60 | 160 | 60/180 | 3.0 | 100 | 85 | 1250 | 590 | 2200 |
| Lxu 240F60 | 240 | 60/180 | 3.5 | 70 | 120 | 1550 | 820 | 2500 |
| Lxu 320F60 | 320 | 60/180 | 3.8 | 65 | 145 | 1950 | - | 2900 |

All values only valid with XENAX® Xvi and 20% S-Curve


3.2.3 Power Supply, Speed Lxu

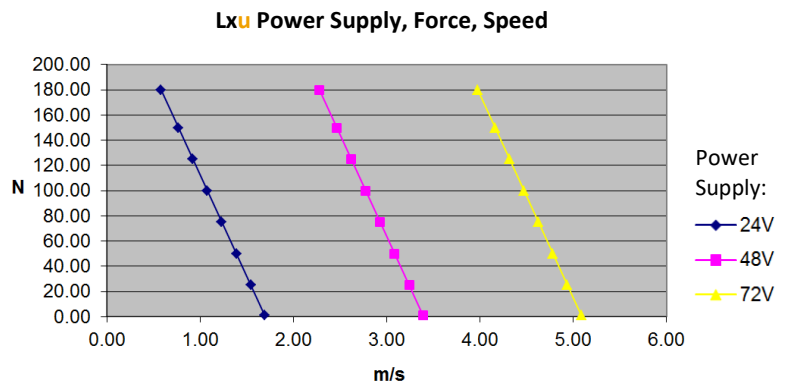

3.3 Precision LINAX® Lxu


3.3.1 Positioning Lxu

| | |
|--|---|
| Standard magnetic measuring scale | 1µm / counter increment |
| Repeatability | < +/-5µm |
| Optional optical measuring scale | 1µm / counter increment |
| Repeatability | < +/-2µm |
| Optional optical measuring scale with high resolution | 100nm / counter increment |
| Repeatability | < +/-500nm |
| Linear expansion magnetic measuring scale | 11µm/m/°C |
| Linear expansion optical measuring scale | 8.5µm/m/°C |
| Reference | Automatic calculation of the absolute position through the distance coded reference marks, max 10mm with optical and max 40mm with magnetic measuring scale, direction of reference can be selected. The reference has to be completed only once after powering on the logic power (24V). The absolute position will be stored until the logic power is turned off (XENAX® Servo controller). |
| Mechanical zero point | It is located 1.5mm before the mechanical limit. This is where the slider is positioned on the right end while the cable case is in the front of the user. |
| Correction table for position errors with servo controller Xvi 48V8/75V8/75V8S | The XENAX® servo controller offers the possibility to correlate the encoder position with the actual position. |

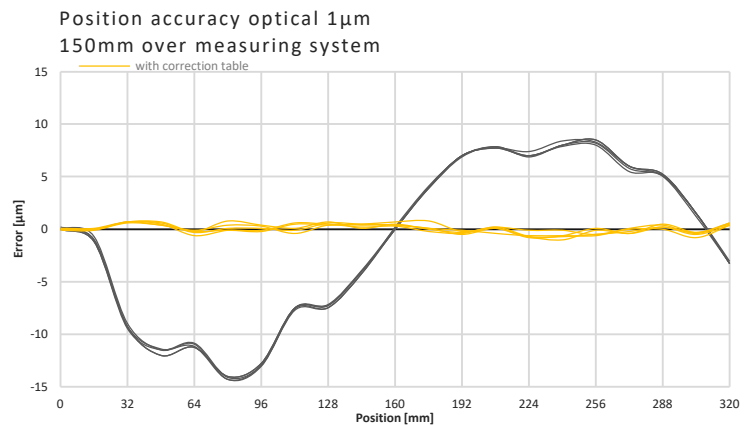

3.3.2 Guidings of Slider Lxu

Ball bearing guides are used for the LINAX® Lxu linear motors. This guiding system is maintenance free for 20'000km or five years as stated by the supplier.

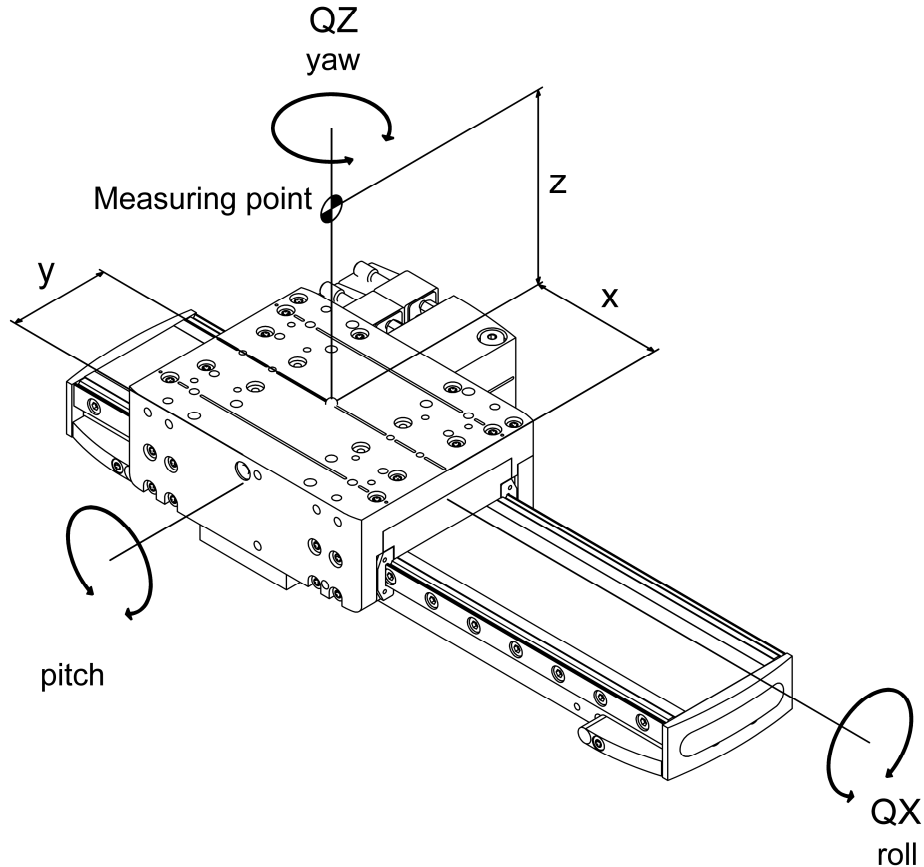

The LINAX® Lxu linear motor axes have following tolerances as a standard. These data is based on measures with linear motors free of load.


| LINAX® | Running Accuracy horizontal EYX [μm] | Running Accuracy vertical EZX [μm] | Tilt Error QX (roll) [arcsec] | Tilt Error QY (pitch) [arcsec] | Tilt Error QZ (yaw) [arcsec] | Tolerance Constr. height [mm] |
|------------|--|--|-------------------------------------|--------------------------------------|------------------------------------|-------------------------------------|
| Lxu 40F60 | ±5 | ±4 | ±8 | ±10 | ±15 | ±0,1 |
| Lxu 80F60 | ±5 | ±4 | ±8 | ±10 | ±20 | ±0,1 |
| Lxu 160F60 | ±8 | ±5 | ±10 | ±20 | ±25 | ±0,1 |
| Lxu 240F60 | ±10 | ±5 | ±10 | ±20 | ±30 | ±0,1 |
| Lxu 320F60 | ±12 | ±6 | ±10 | ±20 | ±35 | ±0,1 |

3.3.3 Typical measurement results LINAX® Lxu 320F60 of series production

Position accuracy

Resolution optical: 1 µm
 Absolute accuracy: ±5 µm
 Repeatability forward: 0.6 µm
 Repeatability backward: 0.7 µm
 Repeatability bi-directional: 1.2 µm

Position accuracy 55mm over (Z) measuring system

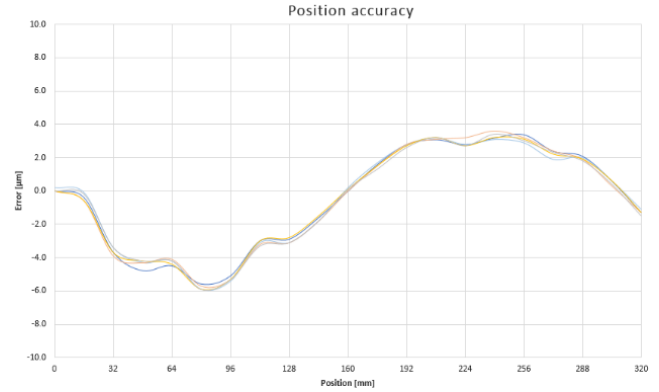

Tilt error

QX roll: ±6.8 asec
 QY pitch: ±7.6 asec
 QZ yaw: ±15.2 asec




3.4 Stress Values of Guides Lxu


| LINAX® Lxu | Mx max [Nm] | Fy max [N] Fz max [N] | My max [Nm] Mz max [Nm] |
|------------|----------------|--------------------------|----------------------------|
| Lxu xxF60 | 149 | 5400 | 211 |

Besides adhering to the individual maximal loads, the following equation must comply if there are multiple forces and moments acting simultaneously on the linear motor:

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

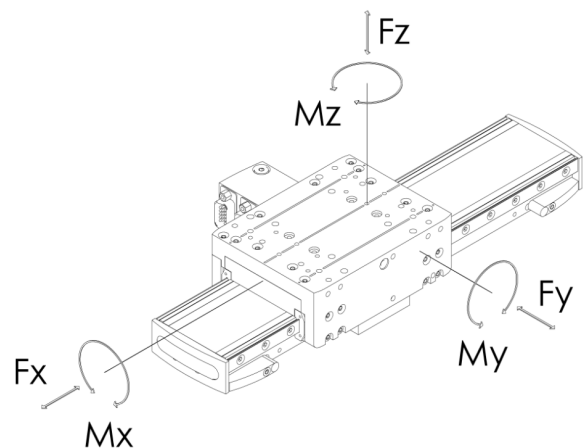


3.5 Installation Dimensions LINAX® Lxu 40 – Lxu 320

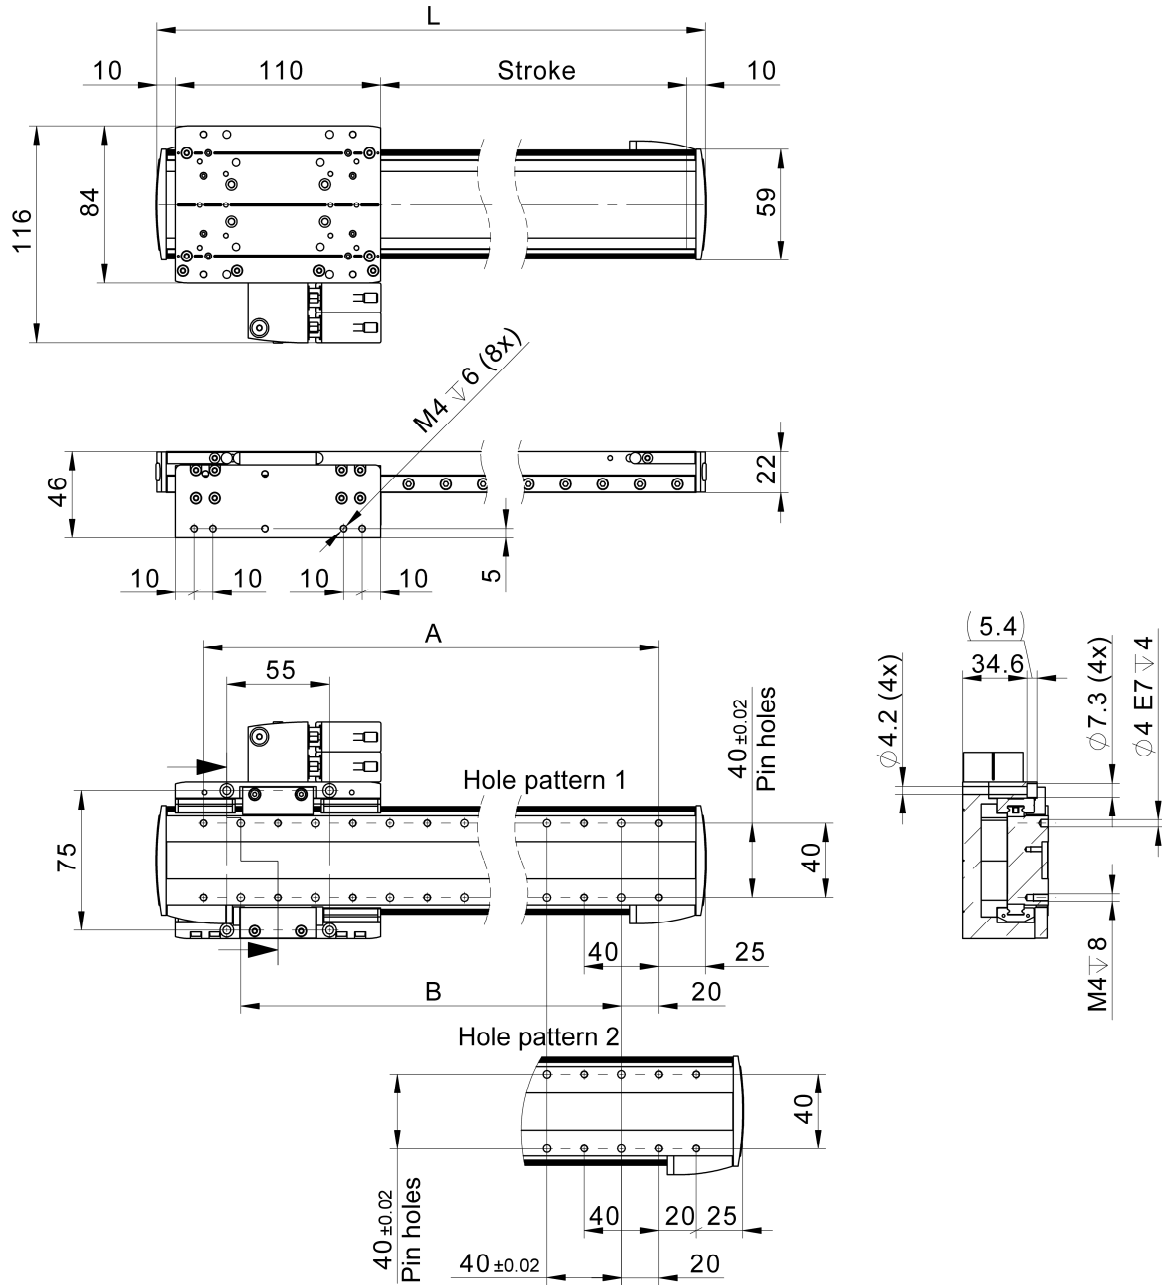


| Type | Stroke[mm] | L[mm] | A[mm] | B[mm] | Hole pattern |
|------------|------------|-------|-------|-------|--------------|
| Lxu 40F60 | 40 | 170 | 80 | 40 | 2 |
| Lxu 80F60 | 80 | 210 | 160 | 120 | 1 |
| Lxu 160F60 | 160 | 290 | 240 | 200 | 1 |
| Lxu 240F60 | 240 | 370 | 320 | 280 | 1 |
| Lxu 320F60 | 320 | 450 | 400 | 360 | 1 |


Cross table with **Lxc F08 / F10** Monoblock

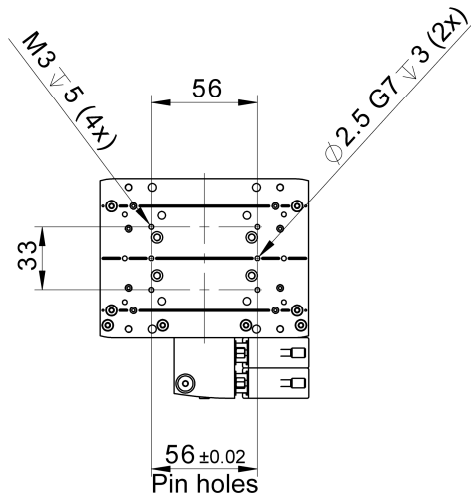


Cross table width **Lxc F40** Monoblock

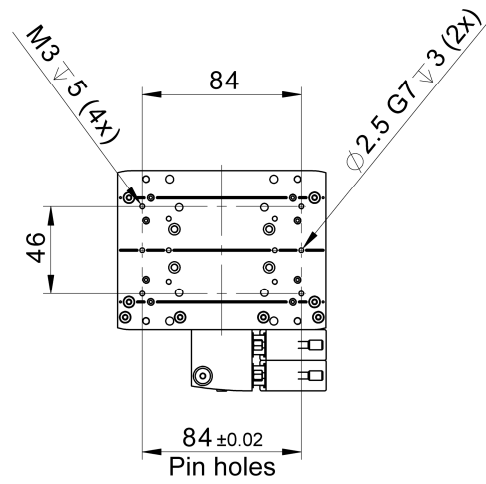


Cantilever with **Lxu F60** slider (back to back)

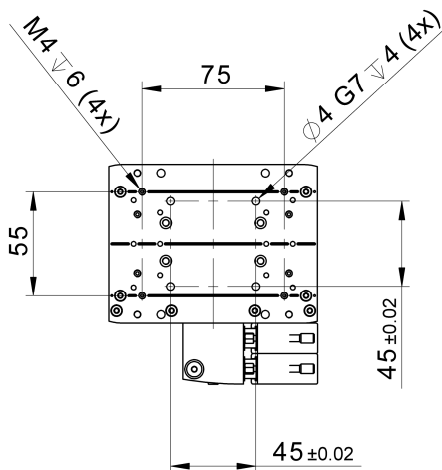

Application with **Lxu** front flange

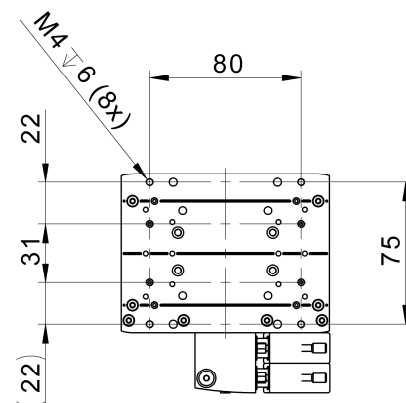



Cantilever with **Ex F20**

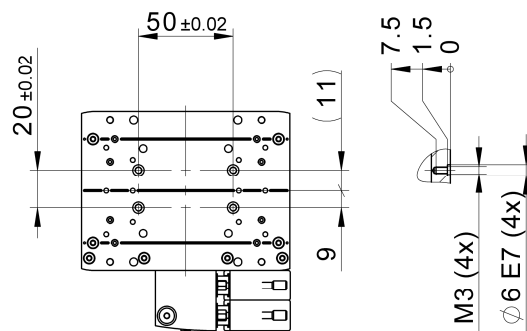


4 LINAX® Lxs F60

4.1 External Dimensions Lxs F60


| LINAX® Lxs | L [mm] |
|-------------|--------|
| Lxs 160F60 | 290 |
| Lxs 200F60 | 330 |
| Lxs 320F60 | 450 |
| Lxs 400F60 | 530 |
| Lxs 520F60 | 650 |
| Lxs 600F60 | 730 |
| Lxs 800F60 | 930 |
| Lxs 1000F60 | 1130 |
| Lxs 1200F60 | 1330 |
| Lxs 1600F60 | 1730 |

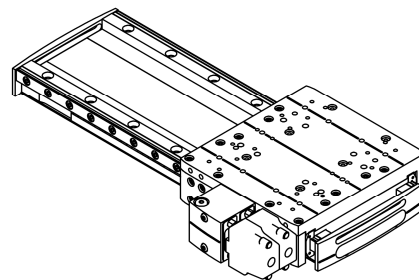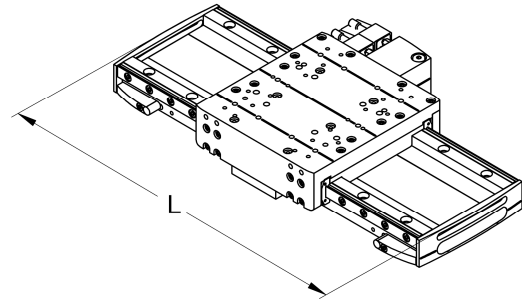

Lxs mechanical zero point according to REFERENCE:
Carriage positioned 1.5mm from the stop on the right,
when viewed from the connector housing.

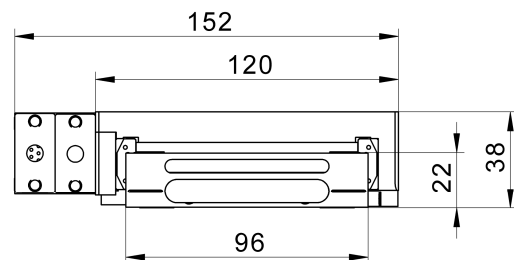

Lxs and Lxu
Rotatable connector housing in 90° increments
Standard cable outlet to the right
when viewed from the connector housing.

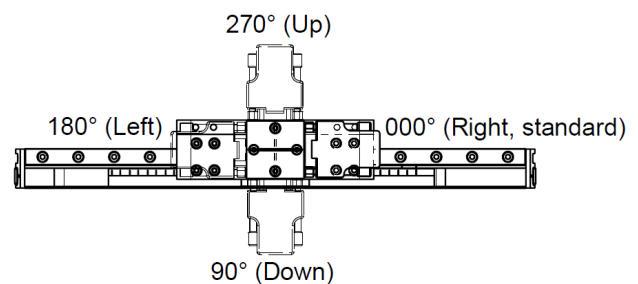


4.2 Dynamics LINAX® LxS F60

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel Time/stroke [ms] | Weight Slider [g] | Weight Total [g] |
|-------------|----------------|------------------------|----------------------|---|---------------------------------|----------------------|---------------------|
| LxS 160F60 | 160 | 60/180 | 3.0 | 120 | 80 | 1000 | 2600 |
| LxS 200F60 | 200 | 60/180 | 3.5 | 120 | 90 | 1000 | 2800 |
| LxS 320F60 | 320 | 60/180 | 3.8 | 120 | 120 | 1000 | 3450 |
| LxS 400F60 | 400 | 60/180 | 4.0 | 120 | 135 | 1000 | 3900 |
| LxS 520F60 | 520 | 60/180 | 4.0 | 120 | 165 | 1000 | 4500 |
| LxS 600F60 | 600 | 60/180 | 4.0 | 120 | 185 | 1000 | 5000 |
| LxS 800F60 | 800 | 60/180 | 4.0 | 120 | 235 | 1000 | 6100 |
| LxS 1000F60 | 1000 | 60/180 | 4.0 | 120 | 285 | 1000 | 7200 |
| LxS 1200F60 | 1200 | 60/180 | 4.0 | 120 | 335 | 1000 | 8400 |
| LxS 1600F60 | 1600 | 60/180 | 4.0 | 120 | 435 | 1000 | 10600 |

All values only valid with XENAX® Xvi and 20% S-Curve

4.2.1 Power Supply, Speed LxS F60

LxS Power Supply, Force, Speed

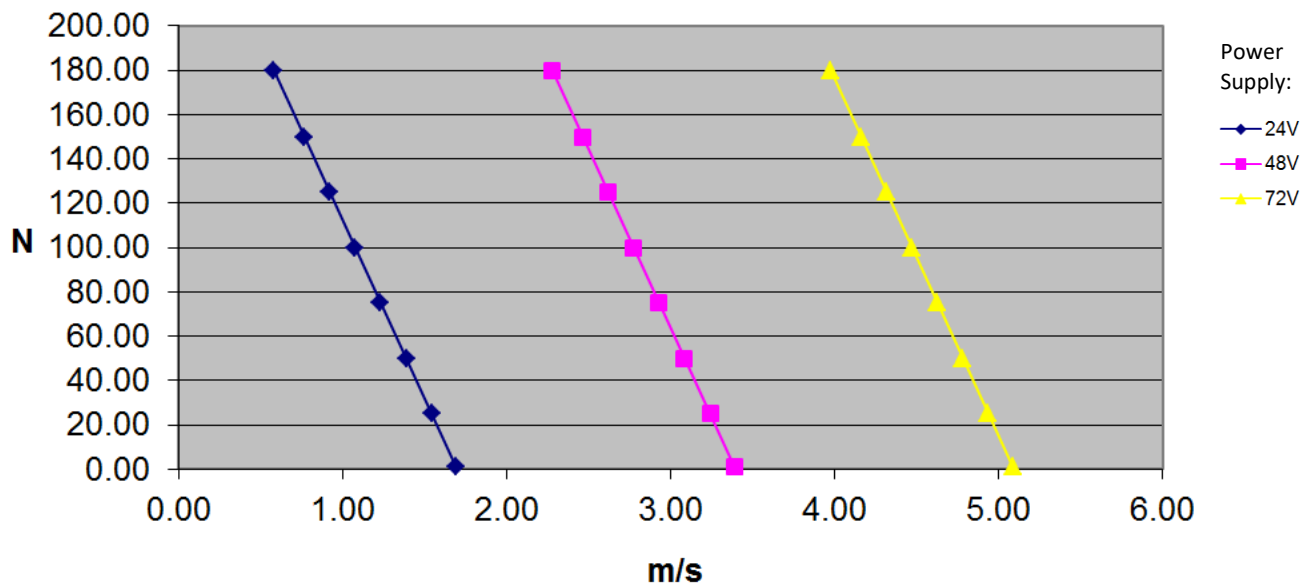


4.3 Precision LINAX® Lxs

4.3.1 Positioning Lxs

| | |
|--|---|
| Standard magnetic, resolution | 1µm / increment |
| Repeatability | < +/-5µm |
| Optional optical, resolution | 1µm / increment, available up to 1200mm stroke |
| Repeatability | < +/-2m |
| Optional optical high resolution | 100nm / increment, available up to 1200mm stroke |
| Repeatability | < +/-500nm |
| Length expansion magnetic measuring scale | 11µm/m/°C |
| Length expansion optical measuring scale | 8.5µm/m/°C |
| Reference: Automatic calculation of the absolute position by crossing two distance-coded reference marks. | Required maximum travel distance for reference: max 10mm for the optical system max 40mm for the magnetic Lxs 160-600 max 60mm for the magnetic Lxs 800-1600 The travel direction is selectable. The reference procedure only needs to be initiated once after turning on the logic power supply (24V). The absolute position is maintained as long as the logic power supply remains connected (XENAX® Servocontroller). |
| Position of mechanical zero point | 1.5mm away from the mechanical limit stop, with the carriage positioned at the right end when viewed from the connector housing side. |
| Software-based correction of position errors. Mechanical pitch and roll errors result in additional position errors: The farther away from the scale, the greater the error. | With an interferometer at the relevant measuring point, these position errors are captured in a tabular form. This correction table is then stored in the XENAX® Xvi Servocontroller. The positions are corrected according to this table, with linear interpolation of the intermediate positions. |

Measurement system 1µm optical, relevant measurement point 150mm above the scale

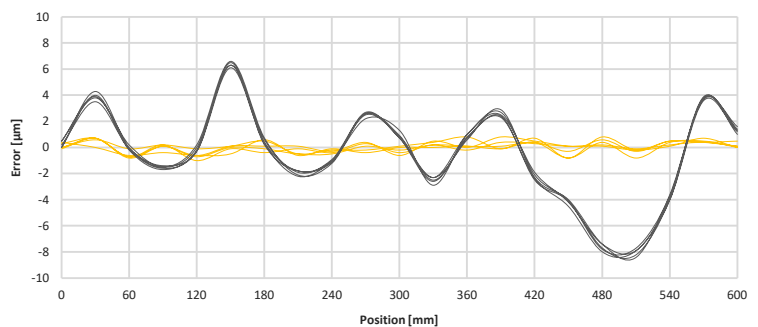


- **Gray**, position errors measured at the relevant point of the setup, measurement system 1µm resolution optical

- **Yellow**, position errors measured at the same point with correction using the correction table

4.3.2 Guidings of Slider Lxs F60

In the LINAX® Lxs linear motor axes, ball recirculating guides are used. These guides are maintenance-free for up to 20,000km or 3 years. After that, they should be re-lubricated.

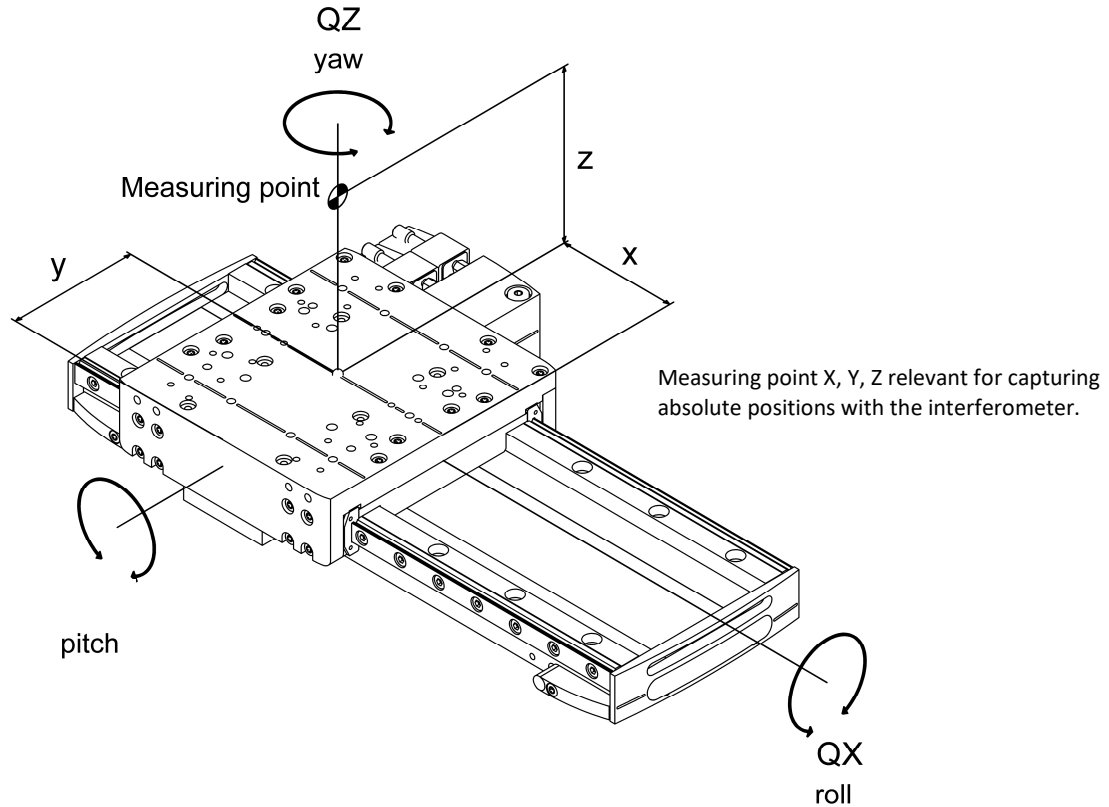


The LINAX® Lxs linear motor axes are delivered with the following tolerances as standard. The specifications are based on an unloaded condition.

| LINAX® | Running Accuracy horizontal EYX [μm] | Running Accuracy vertical EZX [μm] | Tilt Error QX (roll) [arcsec] | Tilt Error QY (pitch) [arcsec] | Tilt Error QZ (yaw) [arcsec] | Tolerance Constr. height [mm] |
|-------------|--|--|-------------------------------------|--------------------------------------|------------------------------------|-------------------------------------|
| Lxs 160F60 | ±5 | ±3 | ±5 | ±10 | ±10 | ±0,1 |
| Lxs 200F60 | ±5 | ±3 | ±5 | ±10 | ±10 | ±0,1 |
| Lxs 320F60 | ±8 | ±4 | ±15 | ±20 | ±15 | ±0,1 |
| Lxs 400F60 | ±10 | ±4 | ±15 | ±20 | ±15 | ±0,1 |
| Lxs 520F60 | ±10 | ±4 | ±20 | ±20 | ±20 | ±0,1 |
| Lxs 600F60 | ±10 | ±5 | ±20 | ±20 | ±20 | ±0,1 |
| Lxs 800F60 | ±10 | ±7 | ±25 | ±25 | ±25 | ±0,1 |
| Lxs 1000F60 | ±12 | ±8 | ±30 | ±25 | ±25 | ±0,1 |
| Lxs 1200F60 | ±13 | ±9 | ±30 | ±25 | ±25 | ±0,1 |
| Lxs 1600F60 | ±16 | ±12 | ±35 | ±30 | ±30 | ±0,1 |

4.3.3 Typical measurement results LINAX® LxS 600F60 of series production


Position accuracy

| | |
|--|---------|
| Resolution optical: | 1 µm |
| Absolute accuracy: | ±2.9 µm |
| Repeatability forward: | 0.7 µm |
| Repeatability backward: | 0.7 µm |
| Repeatability bi-directional: | 1.3 µm |
| Position accuracy 50mm over (Z) measuring system | |

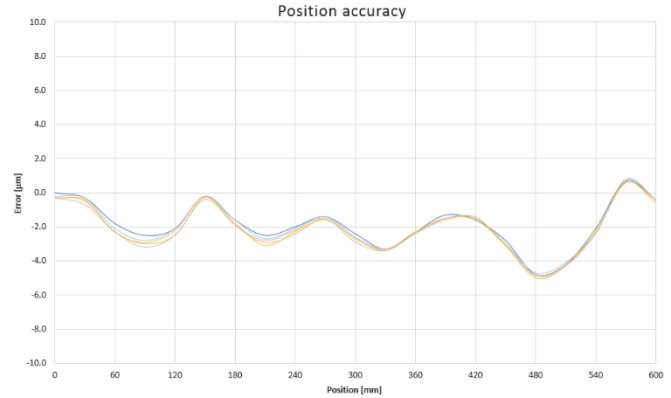

Tilt error

| | | |
|-----------|------|------|
| QX roll: | ±4.7 | asec |
| QY pitch: | ±6.9 | asec |
| QZ yaw: | ±5.1 | asec |

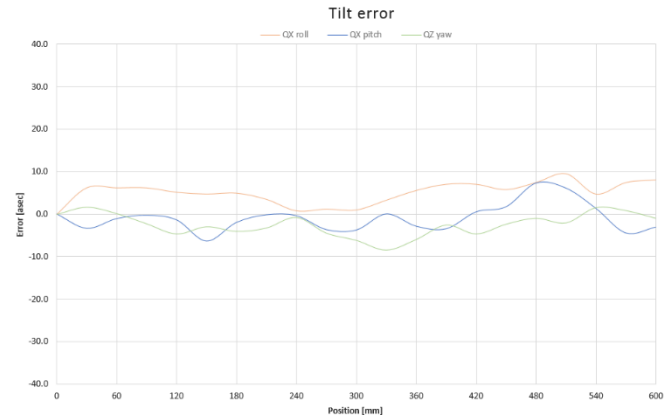


4.4 Load parameters of Guides LxS


| LINAX® LxS | Mx max [Nm] | Fy max [N] Fz max [N] | My max [Nm] Mz max [Nm] |
|------------|----------------|--------------------------|----------------------------|
| LxS xxF60 | 243 | 5400 | 211 |

Besides adhering to the individual maximal loads, the following equation must comply if there are multiple forces and moments acting simultaneously on the linear motor:

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

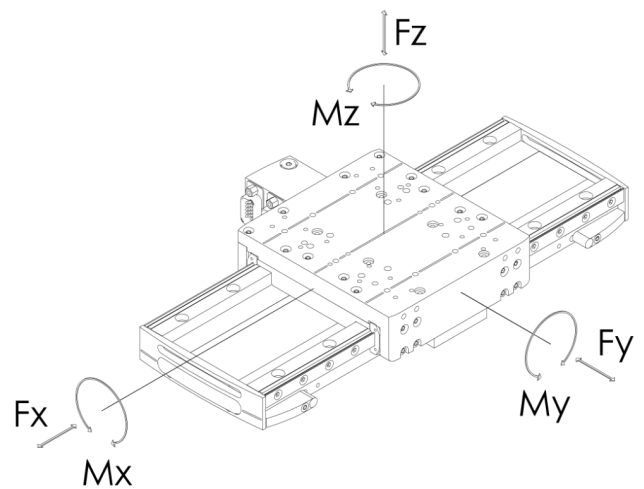


4.5 Installation Dimensions LINAX® Lxs 160 – Lxs 1600

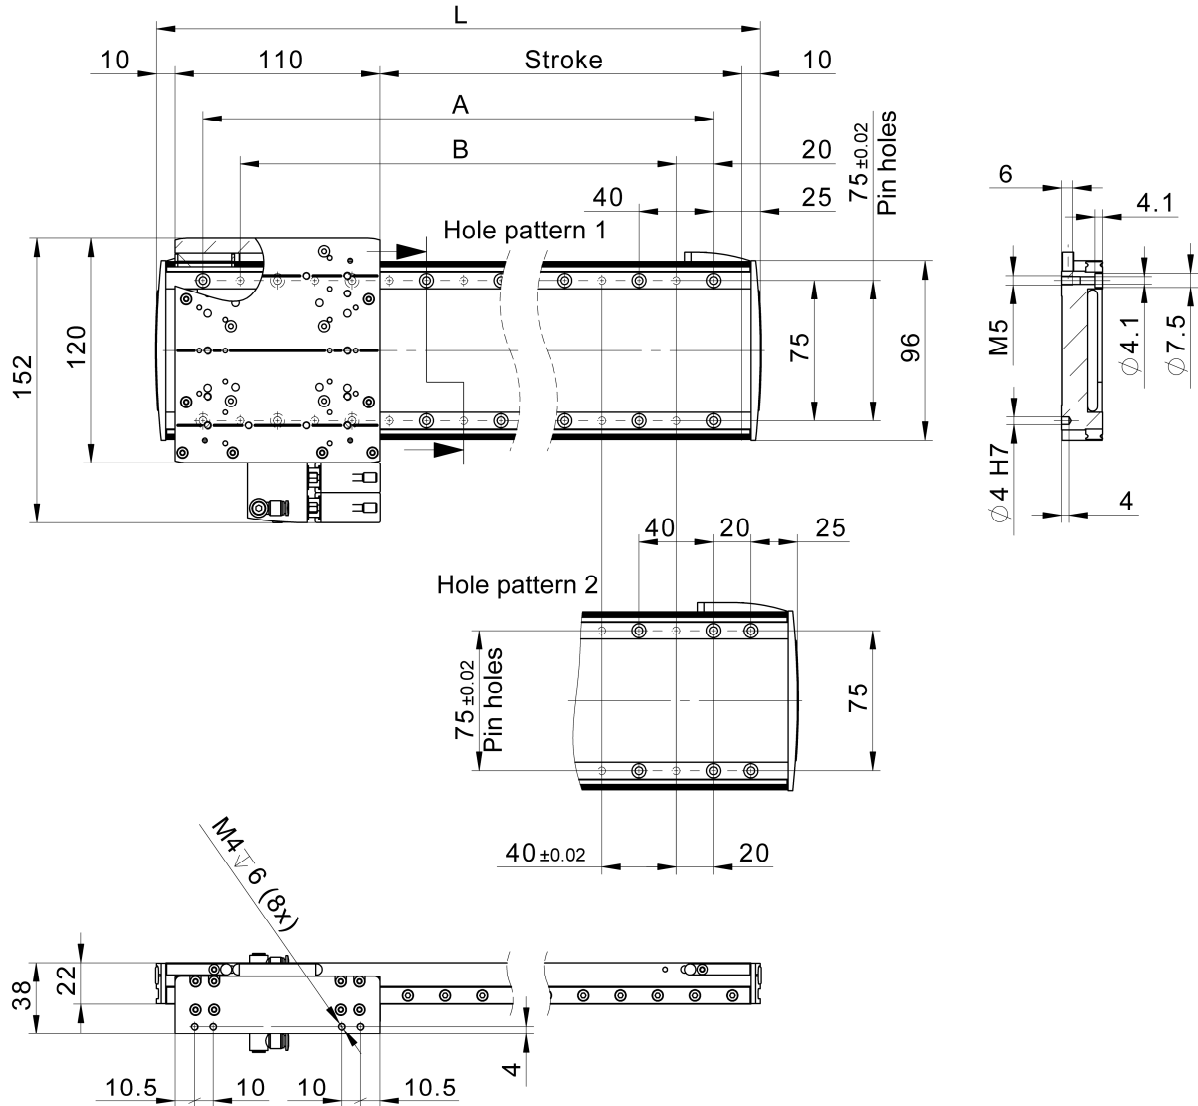


| Type | Stroke[mm] | L[mm] | A[mm] | B[mm] | Hole pattern |
|-------------|------------|-------|-------|-------|--------------|
| Lxs 160F60 | 160 | 290 | 240 | 200 | 1 |
| Lxs 200F60 | 200 | 330 | 240 | 200 | 2 |
| Lxs 320F60 | 320 | 450 | 400 | 360 | 1 |
| Lxs 400F60 | 400 | 530 | 480 | 440 | 1 |
| Lxs 520F60 | 520 | 650 | 560 | 520 | 2 |
| Lxs 600F60 | 600 | 730 | 640 | 600 | 2 |
| Lxs 800F60 | 800 | 930 | 880 | 840 | 1 |
| Lxs 1000F60 | 1000 | 1130 | 1040 | 1000 | 2 |
| Lxs 1200F60 | 1200 | 1330 | 1280 | 1240 | 1 |
| Lxs 1600F60 | 1600 | 1730 | 1680 | 1640 | 1 |


Cross table width **Lxc F40** Monoblock

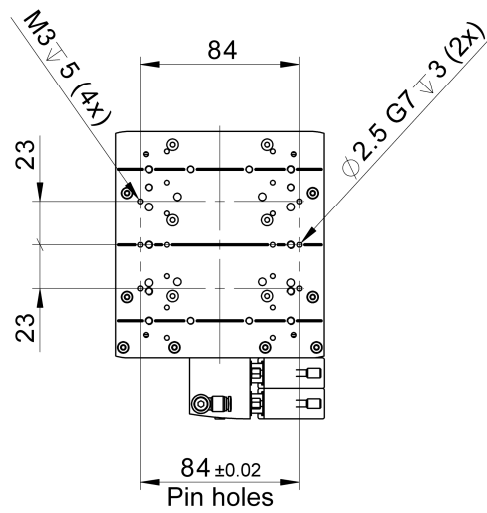


Application with Lxu front flange

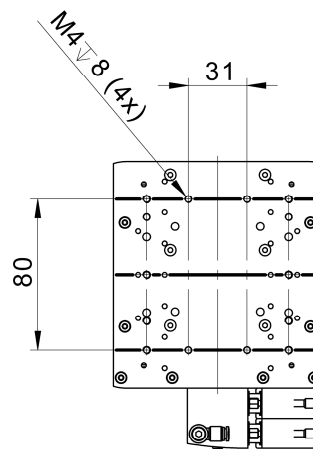

Cross table with LxS F60 Base plate

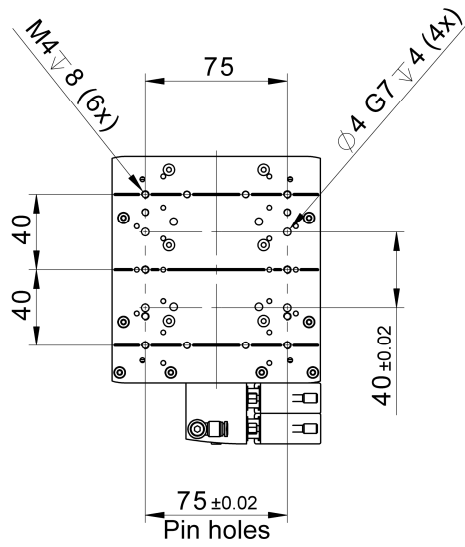




Cantilever with Ex F20

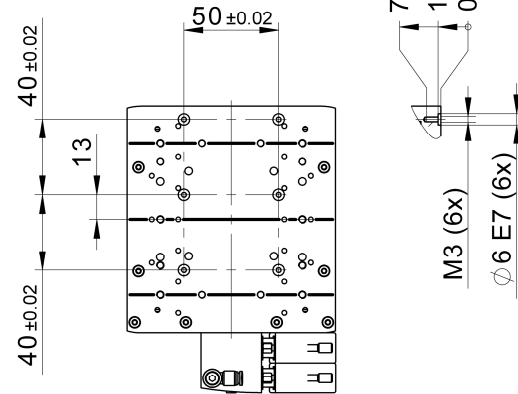


5 LINAX® Lxs F120

5.1 External Dimensions Lxs F120

| LINAX® Lxs | L [mm] | Zero point [mm] |
|--------------|--------|-----------------|
| Lxs 080F120 | 243 | 20 |
| Lxs 200F120 | 363 | 40 |
| Lxs 400F120 | 563 | 20 |
| Lxs 520F120 | 683 | 40 |
| Lxs 600F120 | 763 | 40 |
| Lxs 800F120 | 963 | 40 |
| Lxs 1000F120 | 1163 | 40 |
| Lxs 1200F120 | 1363 | 40 |
| Lxs 1600F120 | 1763 | 40 |
| Lxs 2000F120 | 2163 | 40 |

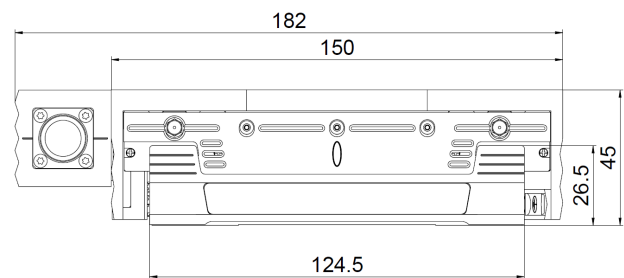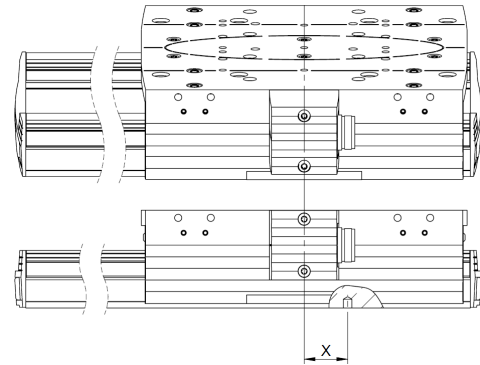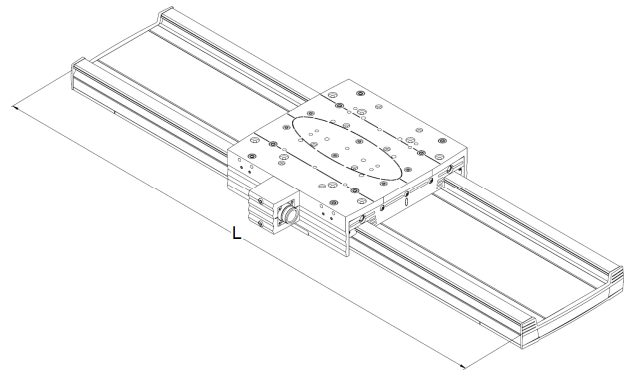

Lxs and Lxu
Rotatable connector housing in 90° increments
Standard cable outlet to the right
when viewed from the connector housing.

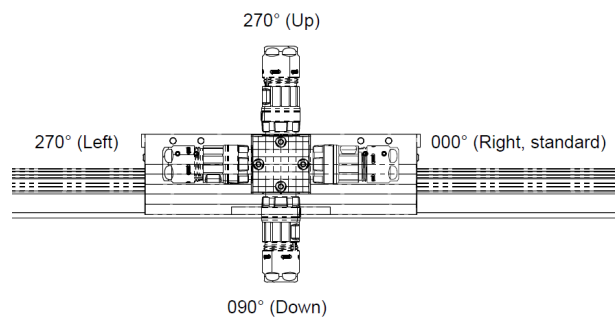


5.2 Dynamics LINAX® LxS F120

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel Time/stroke [ms] | Weight Slider [kg] | Weight Total [kg] |
|--------------|----------------|------------------------|----------------------|---|---------------------------------|-----------------------|----------------------|
| LxS 080F120 | 080 | 120/300 | 1.8 /2.8/*3.8 | 100 | 58 | 2.30 | 4.70 |
| LxS 200F120 | 200 | 120/300 | 1.8 /2.8/*3.8 | 100 | 108 | 2.30 | 5.90 |
| LxS 400F120 | 400 | 120/300 | 1.8 /2.8/*3.8 | 100 | 179 | 2.30 | 7.80 |
| LxS 520F120 | 520 | 120/300 | 1.8/2.8/*3.8 | 100 | 222 | 2.30 | 9.00 |
| LxS 600F120 | 600 | 120/300 | 1.8/2.8/*3.8 | 100 | 250 | 2.30 | 9.80 |
| LxS 800F120 | 800 | 120/300 | 1.8/2.8/*3.8 | 100 | 322 | 2.30 | 11.80 |
| LxS 1000F120 | 1000 | 120/300 | 1.8/2.8/*3.8 | 100 | 393 | 2.30 | 13.70 |
| LxS 1200F120 | 1200 | 120/300 | 1.8/2.8/*3.8 | 100 | 464 | 2.30 | 15.70 |
| LxS 1600F120 | 1600 | 120/300 | 1.8/2.8/*3.8 | 100 | 607 | 2.30 | 19.60 |
| LxS 2000F120 | 2000 | 120/300 | 1.8/2.8/*3.8 | 100 | 740 | 2.30 | 23.50 |

All values are only valid with XENAX® Xvi and a 20% S-Curve.

5.2.1 Power supply voltage versus speed LxS F120

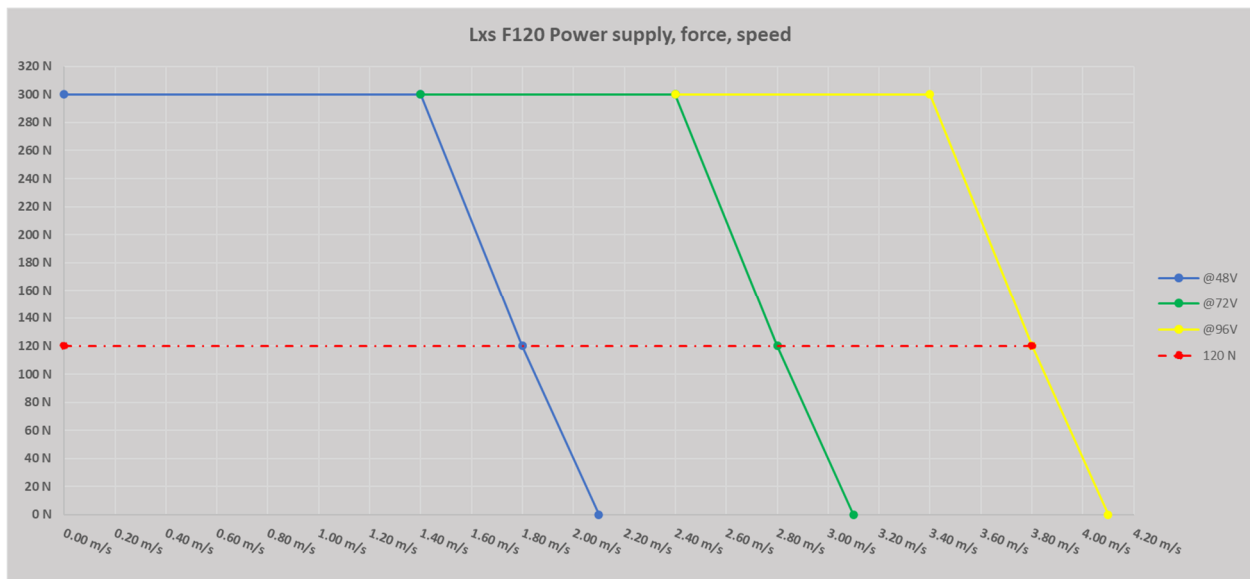

5.3 Precision LINAX® Lxs F120


5.3.2 Absolute positioning Lxs F120

| | |
|--|---|
| Standard magnetic, resolution | 1µm / absolute |
| Repeatability | < +/-2µm |
| Optional optical, resolution | 1µm / absolute |
| Repeatability | < +/-1.5µm |
| Optional optical high resolution | 100nm / absolute |
| Repeatability | < +/-500nm |
| Length expansion magnetic measuring scale | 11µm/m/°C |
| Length expansion of optical stainless steel tape | 10.6µm/m/°C |
| Reference run: | Not required, as the position is available immediately after turning on with the absolute measurement system. |
| Position of mechanical zero point | Positioned 1.5mm away from the mechanical end limit, the carriage is at the right end when viewed from the connector housing. The center of the carriage is aligned with a pinhole. |

Software-based correction of position errors. Mechanical pitch and roll errors result in additional position errors: The farther away from the scale, the greater the error.

With an interferometer at the relevant measuring point, these position errors are captured in a tabular form. This correction table is then stored in the XENAX® Xvi Servocontroller. The positions are corrected according to this table, with linear interpolation of the intermediate positions.

Measurement system 1µm optical, relevant measurement point 150mm above the scale

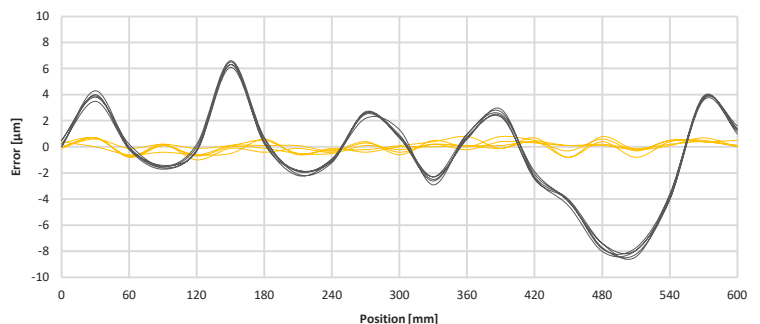


- **Gray**, position errors measured at the relevant point of the setup, measurement system 1µm resolution optical

- **Yellow**, position errors measured at the same point with correction using the correction table

5.3.3 Carriage guide Lxs F120

The LINAX® Lxs linear motor axes utilize robust 4-row ball recirculating guides. These guides are maintenance-free for up to 20,000km or 5 years. After that, they should be re-lubricated.

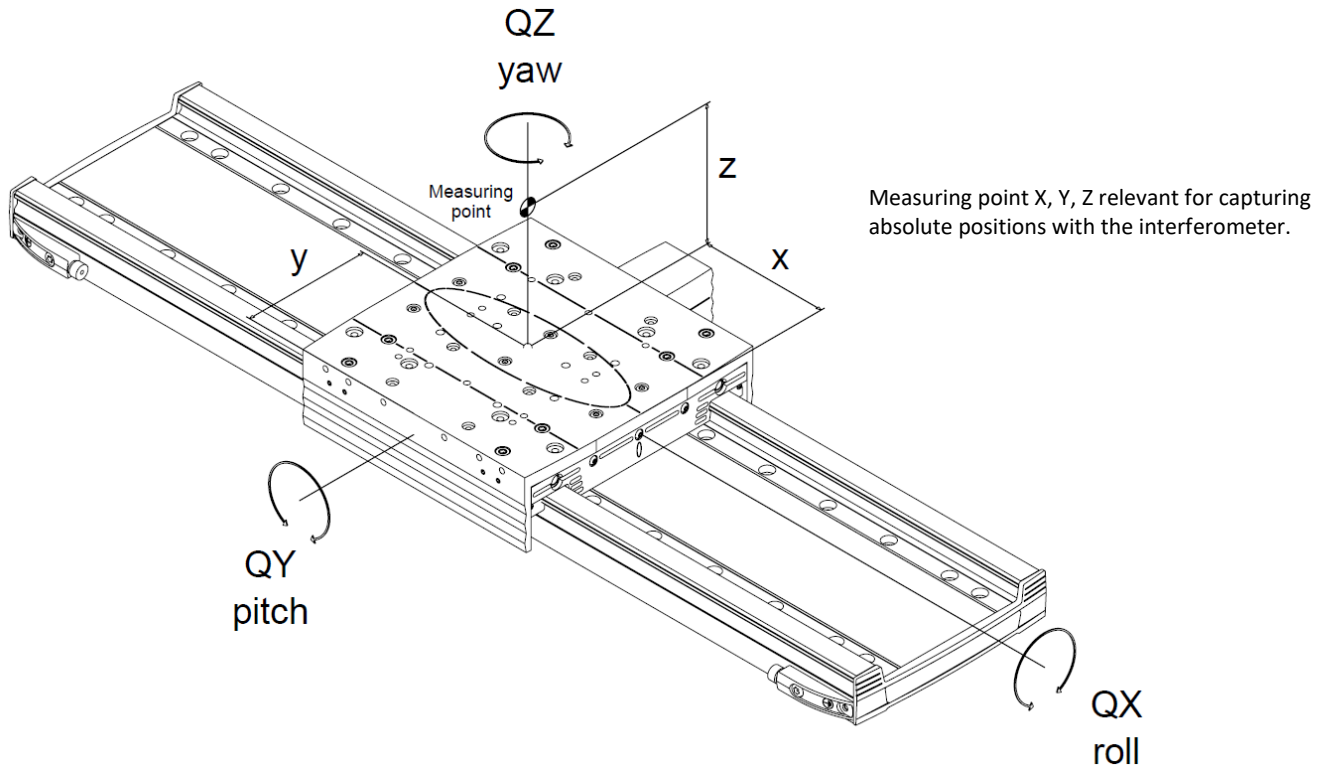


The LINAX® Lxs linear motor axes are delivered with the following tolerances as standard. The specifications are based on an unloaded condition.

| LINAX® | Running Accuracy horizontal EYX [μm] | Running Accuracy vertical EZX [μm] | Tilt Error QX (roll) [arcsec] | Tilt Error QY (pitch) [arcsec] | Tilt Error QZ (yaw) [arcsec] | Tolerance Constr. height [mm] |
|--------------|--|--|-------------------------------------|--------------------------------------|------------------------------------|-------------------------------------|
| Lxs 080F120 | ±4 | ±2 | ±4 | ±10 | ±5 | ±0,1 |
| Lxs 200F120 | ±5 | ±3 | ±5 | ±15 | ±10 | ±0,1 |
| Lxs 400F120 | ±10 | ±4 | ±15 | ±30 | ±15 | ±0,1 |
| Lxs 520F120 | ±10 | ±4 | ±20 | ±30 | ±20 | ±0,1 |
| Lxs 600F120 | ±10 | ±5 | ±20 | ±30 | ±20 | ±0,1 |
| Lxs 800F120 | ±10 | ±7 | ±25 | ±35 | ±25 | ±0,1 |
| Lxs 1000F120 | ±12 | ±8 | ±30 | ±35 | ±25 | ±0,1 |
| Lxs 1200F120 | ±13 | ±9 | ±30 | ±35 | ±25 | ±0,1 |
| Lxs 1600F120 | ±16 | ±12 | ±35 | ±40 | ±30 | ±0,1 |
| Lxs 2000F120 | ±18 | ±14 | ±40 | ±45 | ±35 | ±0,1 |

5.3.4 Typical measurement results LINAX® LxS 600F120 of series production


Position accuracy absolute at relevant measuring point

| | |
|--|---------|
| Resolution optical: | 1 µm |
| Absolute accuracy: | ±2.9 µm |
| Repeatability forward: | 0.6 µm |
| Repeatability backward: | 0.7 µm |
| Repeatability bi-directional: | 1.2 µm |
| Position accuracy 50mm over (Z) measuring system | |

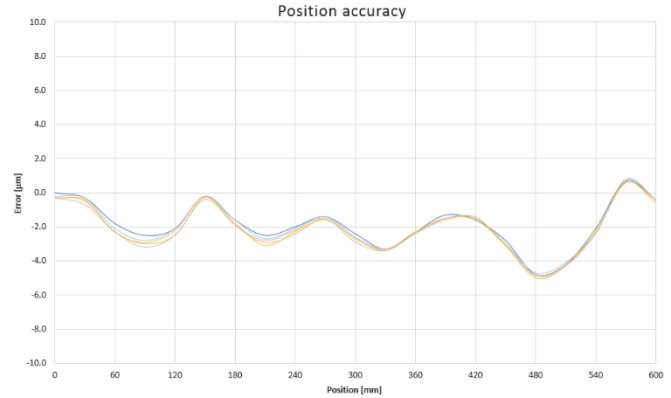

Tilt error

| | | |
|-----------|-------|------|
| QX roll: | ±2.4 | asec |
| QY pitch: | ±13.3 | asec |
| QZ yaw: | ±11.1 | asec |

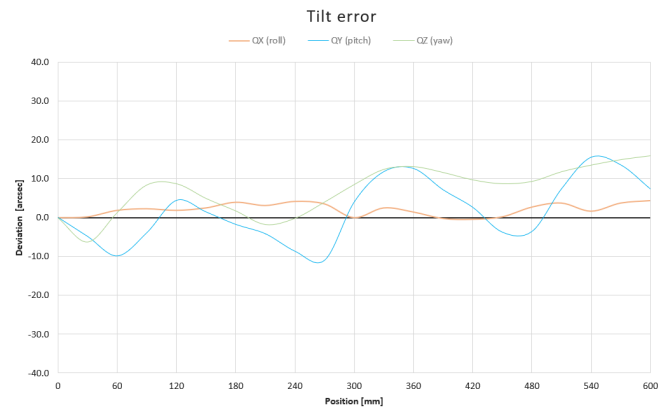


5.4 Load parameters of Guides LxS F120


| LINAX® LxS | Mx max [Nm] | Fy max [N] Fz max [N] | My max [Nm] Mz max [Nm] |
|------------|----------------|--------------------------|----------------------------|
| LxS xxF120 | 444 | 8220 | 411 |

Besides adhering to the individual maximal loads, the following equation must comply if there are multiple forces and moments acting simultaneously on the linear motor:

$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

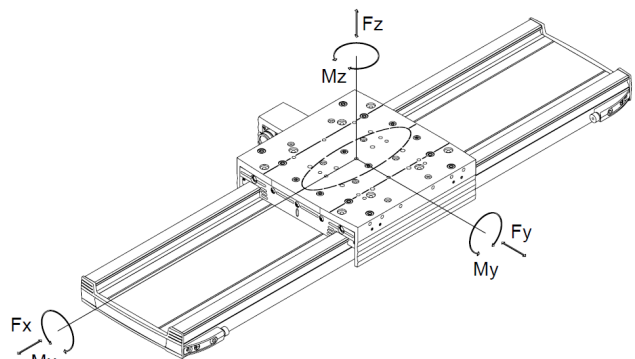


5.5 Installation dimensions LINAX® LxS 80F120 – LxS 2000F120

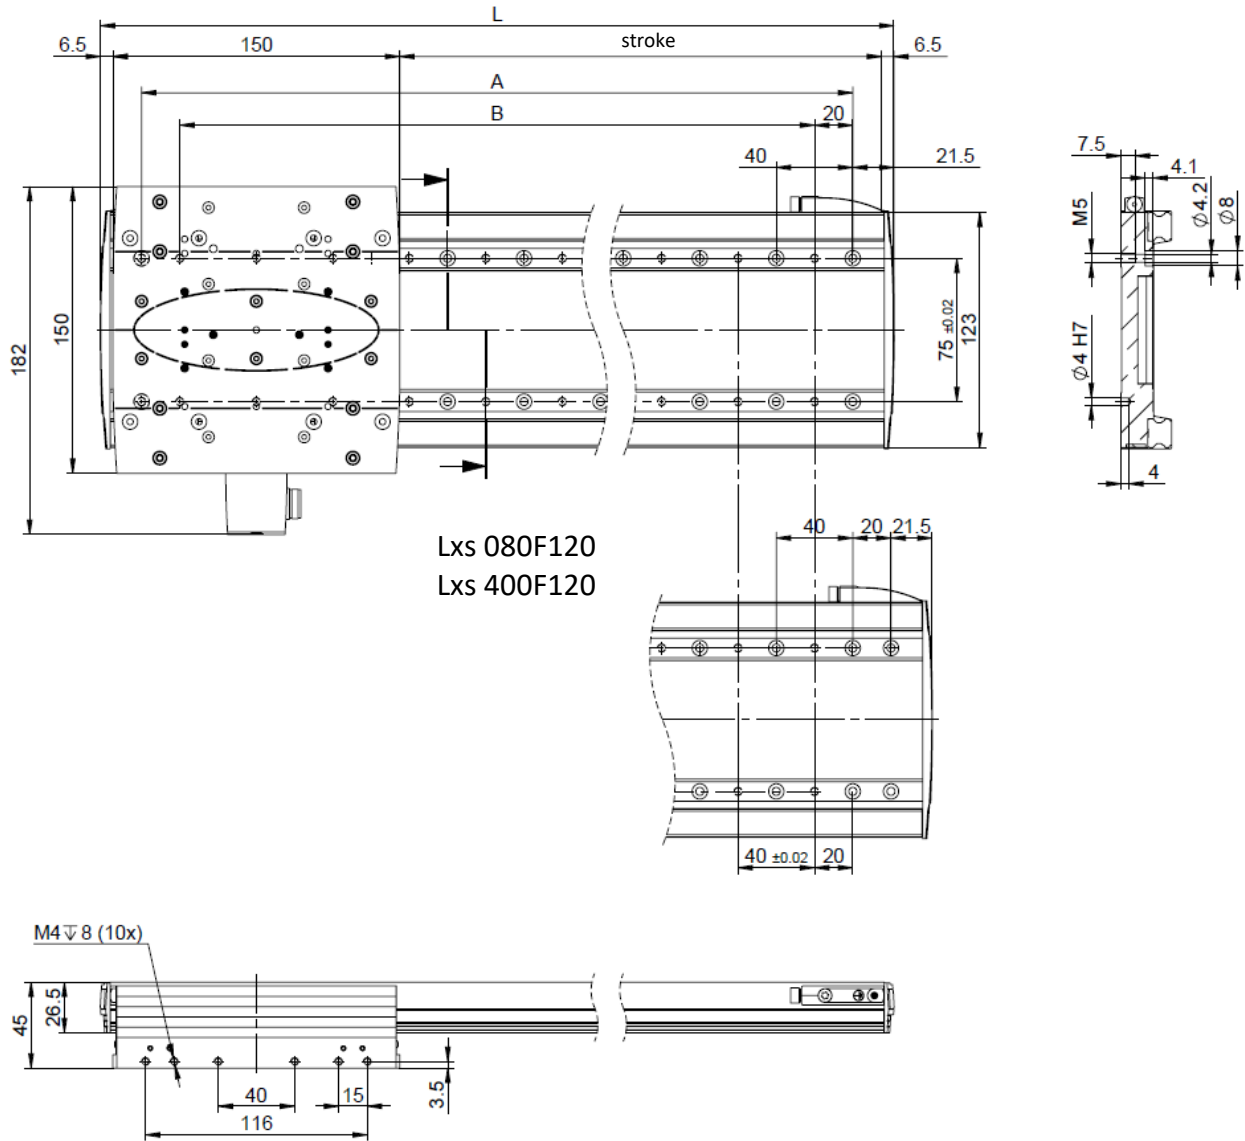


| Typ | Stroke [mm] | L[mm] | A[mm] | B[mm] |
|--------------|-------------|-------|-------|-------|
| LxS 080F120 | 080 | 243 | 200 | 120 |
| LxS 200F120 | 200 | 363 | 320 | 280 |
| LxS 400F120 | 400 | 563 | 520 | 440 |
| LxS 520F120 | 520 | 683 | 640 | 600 |
| LxS 600F120 | 600 | 763 | 720 | 680 |
| LxS 800F120 | 800 | 963 | 920 | 880 |
| LxS 1000F120 | 1000 | 1163 | 1120 | 1080 |
| LxS 1200F120 | 1200 | 1363 | 1320 | 1280 |
| LxS 1600F120 | 1600 | 1763 | 1720 | 1680 |
| LxS 2000F120 | 2000 | 2163 | 2120 | 2080 |


Cantilever with **Lx** **F60** carriage (back to back)

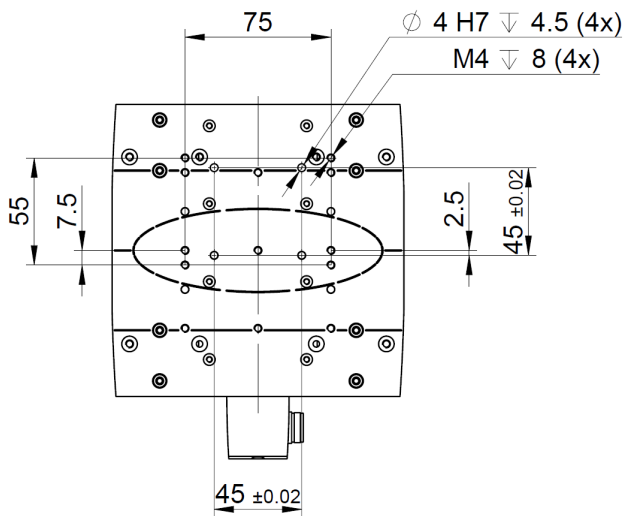


Portal with **Lx** face flange

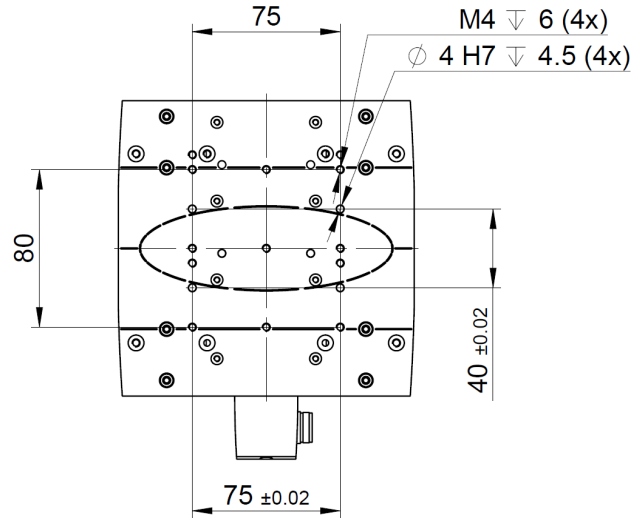


Cross table with **Lx** **F60/120** base plate

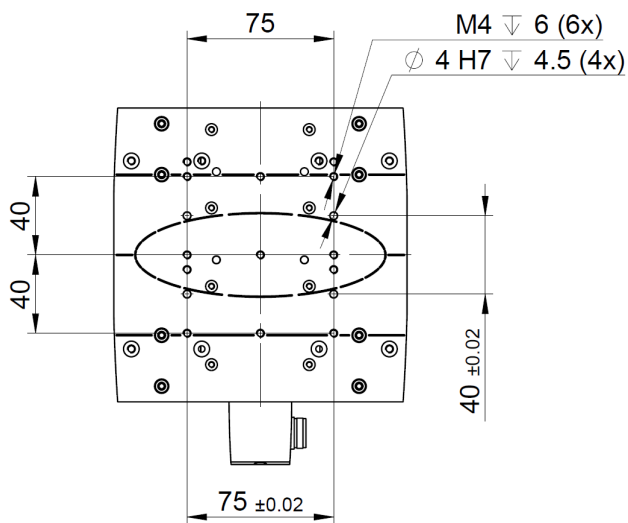

Cantilever with **Ex** **F20**

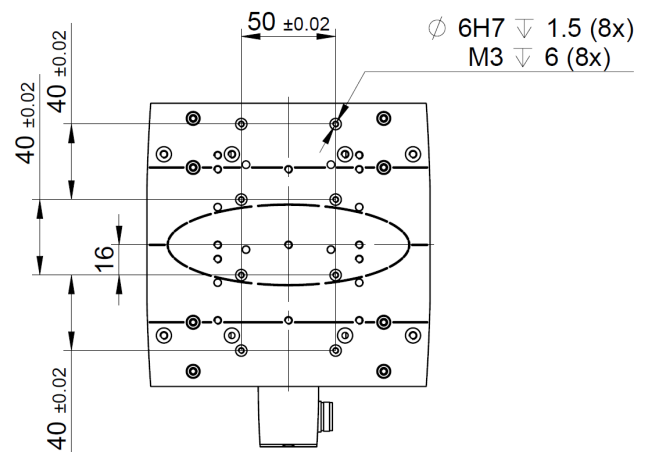



Mounting **Rxhq 110**

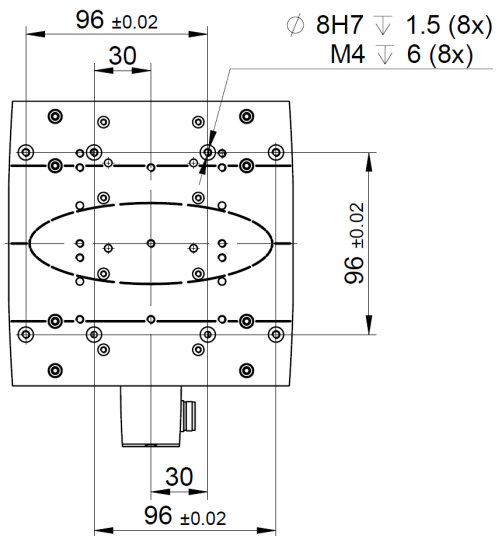


6 LINAX® Lxe F40

6.1 External Dimensions LINAX® Lxe F40


| LINAX® Lxe | L [mm] |
|-------------|--------|
| Lxe 250F60 | 386 |
| Lxe 400F60 | 536 |
| Lxe 550F60 | 686 |
| Lxe 800F60 | 936 |
| Lxe 1000F60 | 1136 |

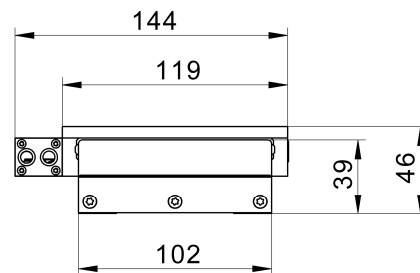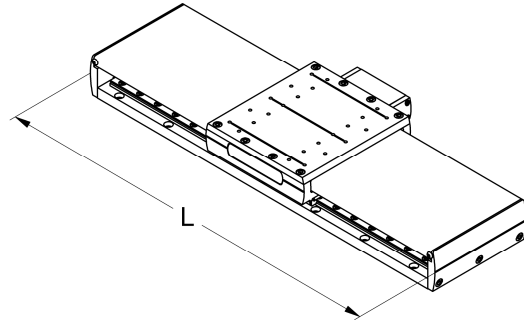

Lxe
Cable outlet to the left or right
Default cable outlet to the right

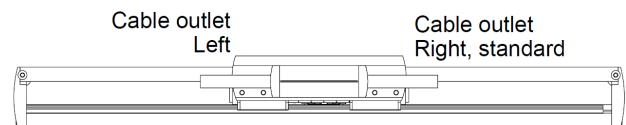

Lxe absolute zero point according to REFERENCE:
Slider extended towards the connection cable

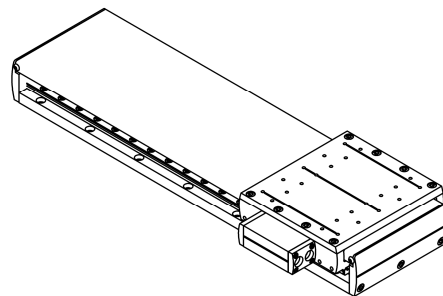


6.2 Dynamics LINAX® Lxe

| LINAX® | Stroke [mm] | Force [N] nom./peak | Speed v-max [m/s] | Acceleration a-max [m/s ²] | Min. travel Time/stroke [ms] | Weight Slider [g] | Weight Total [g] |
|-------------|----------------|------------------------|----------------------|---|---------------------------------|----------------------|---------------------|
| Lxe 250F40 | 250 | 40/114 | 3.5 | 75 | 120 | 980 | 3080 |
| Lxe 400F40 | 400 | 40/114 | 4.0 | 75 | 155 | 980 | 3850 |
| Lxe 550F40 | 550 | 40/114 | 4.0 | 75 | 190 | 980 | 4620 |
| Lxe 800F40 | 800 | 40/114 | 4.0 | 75 | 255 | 980 | 5900 |
| Lxe 1000F40 | 1000 | 40/114 | 4.0 | 75 | 305 | 980 | 6930 |

All values only valid with XENAX® Xvi and 20% S-Curve

6.2.1 Power Supply, Speed Lxe

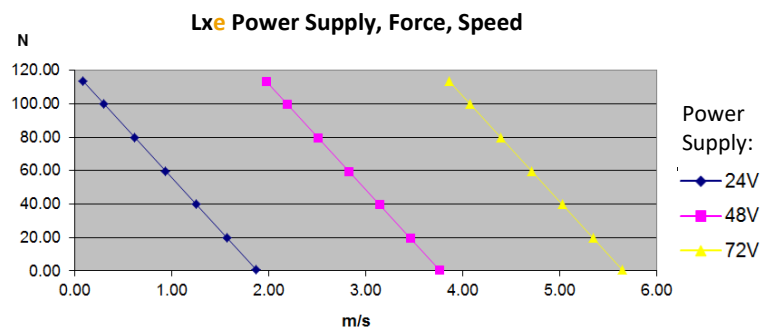

6.3 Precision LINAX® Lxe

6.3.1 Positioning Lxe

| | |
|--|---|
| Standard resolution of optical measuring scale | 1µm / counter increment |
| Repeatability | < +/-2µm |
| Optional optical measuring scale with high resolution | 100nm / counter increment |
| Repeatability | < +/-500nm |
| Linear expansion optical measuring scale | 8.5µm/m/°C |
| Reference | Automatic calculation of the absolute position through the distance coded reference marks, max 10mm, direction of reference can be selected. The reference has to be completed only once after powering on the logic power (24V). The absolute position will be stored until the logic power is turned off (XENAX® Servo controller). |
| Mechanical zero point absolute | 1.5mm before the mechanical limit. This is where the slider is positioned on the right end while the cable case is in the front of the user. |
| Correction table for position errors with servo controller Xvi 48V8/75V8/75V8S | The XENAX® servo controller offers the possibility to correlate the encoder position with the actual position. |

6.3.2 Guidings of Slider Lxe

For the LINAX® Lxe linear motor axis, ball bearing guides are used. This guiding system is maintenance free for 20'000km or five years as stated by the supplier. The LINAX® Lxe linear motor axes have following tolerances as a standard. These data is based on measures with linear motors free of load.


| LINAX® | Running Accuracy horizontal EYX [μm] | Running Accuracy vertical EZX [μm] | Tilt Error QX (roll) [arcsec] | Tilt Error QY (pitch) [arcsec] | Tilt Error QZ (yaw) [arcsec] | Tolerance Constr. height [mm] |
|-------------|--|--|-------------------------------------|--------------------------------------|------------------------------------|-------------------------------------|
| Lxe 250F40 | ±8 | ±5 | ±10 | ±10 | ±15 | ±0,1 |
| Lxe 400F40 | ±10 | ±8 | ±10 | ±10 | ±20 | ±0,1 |
| Lxe 550F40 | ±12 | ±8 | ±20 | ±20 | ±25 | ±0,1 |
| Lxe 800F40 | ±14 | ±10 | ±25 | ±25 | ±25 | ±0,1 |
| Lxe 1000F40 | ±16 | ±10 | ±25 | ±25 | ±30 | ±0,1 |

6.4 Stress Values of Guides Lxe


| LINAX® Lxe | Mx max [Nm] | Fy max [N] Fz max [N] | My max [Nm] Mz max [Nm] |
|------------|----------------|--------------------------|----------------------------|
| Lxe xxF40 | 205 | 5400 | 194 |

Besides adhering to the individual maximal loads, the following equation must comply if there are multiple forces and moments acting simultaneously on the linear motor:


$$\frac{|F_y|}{F_{y \max}} + \frac{|F_z|}{F_{z \max}} + \frac{|M_x|}{M_{x \max}} + \frac{|M_y|}{M_{y \max}} + \frac{|M_z|}{M_{z \max}} \leq 1$$

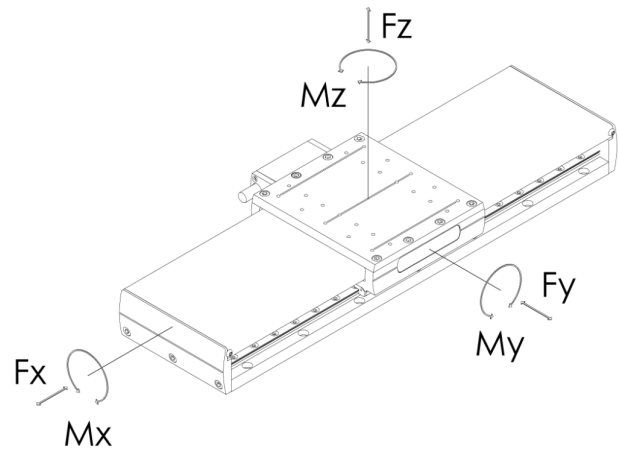


6.5 Dimensions LINAX® Lxe

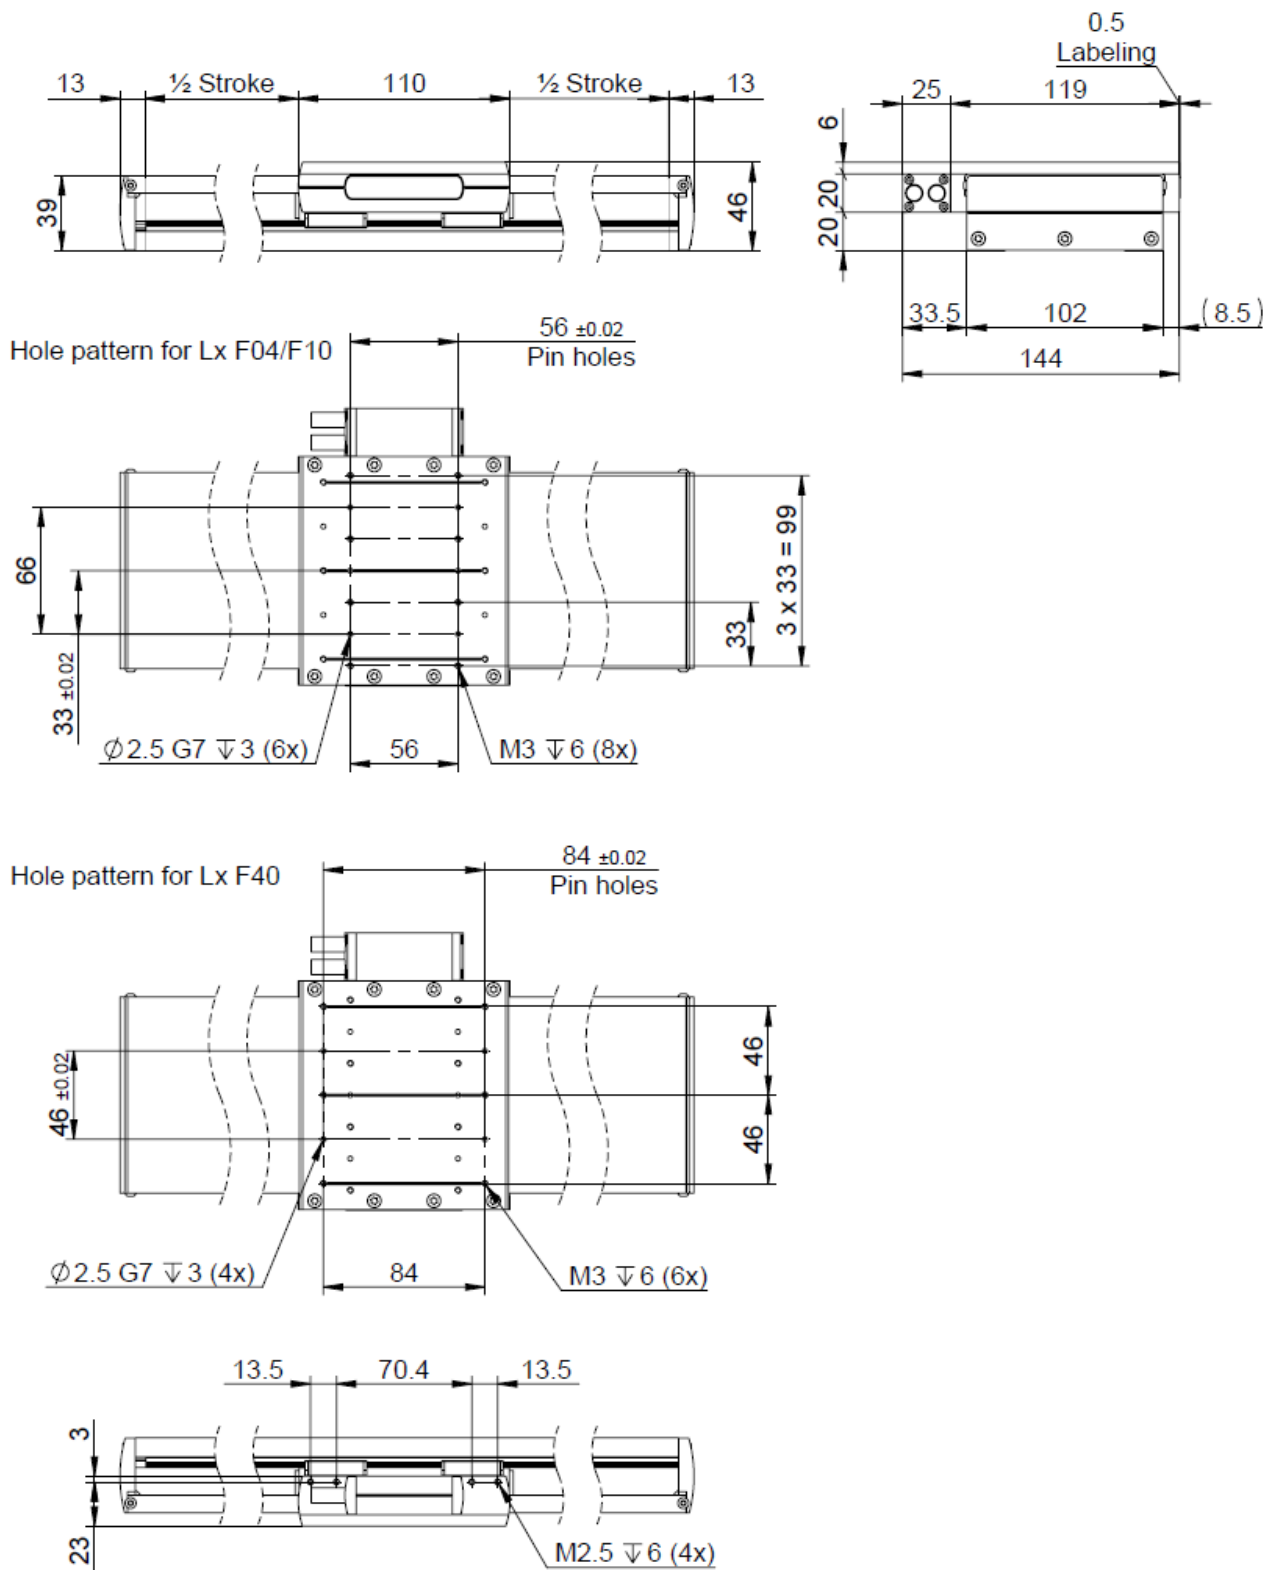


6.5.1 Installation Dimensions LINAX® Lxe 250F40

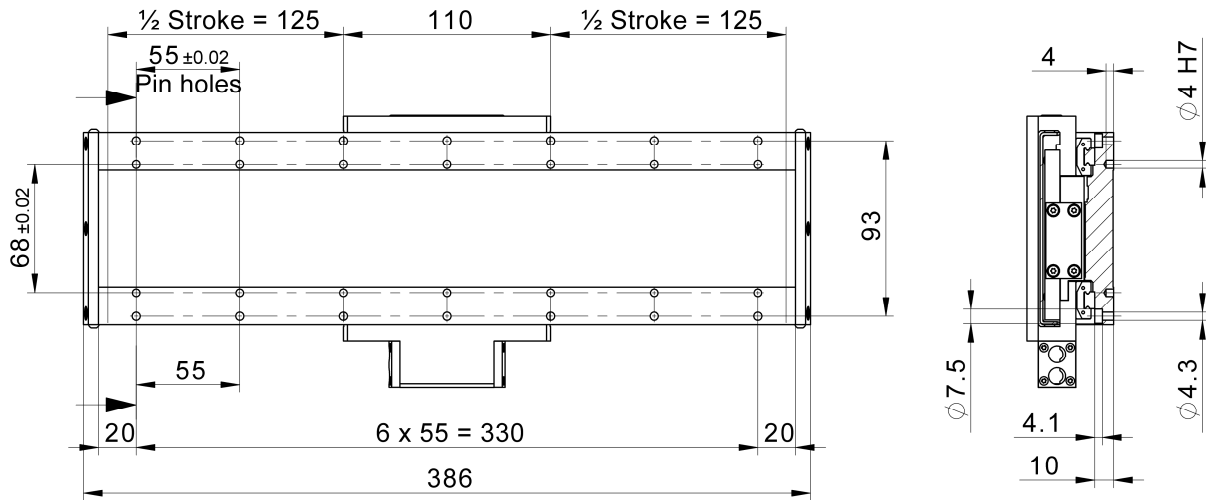

6.5.2 Installation Dimensions LINAX® Lxe 400F40

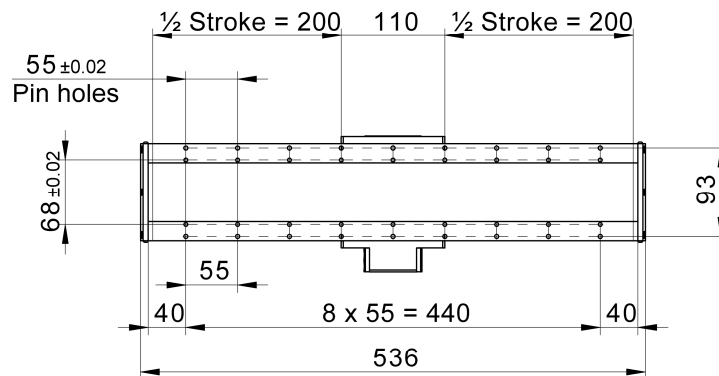

6.5.3 Installation Dimensions LINAX® Lxe 550F40

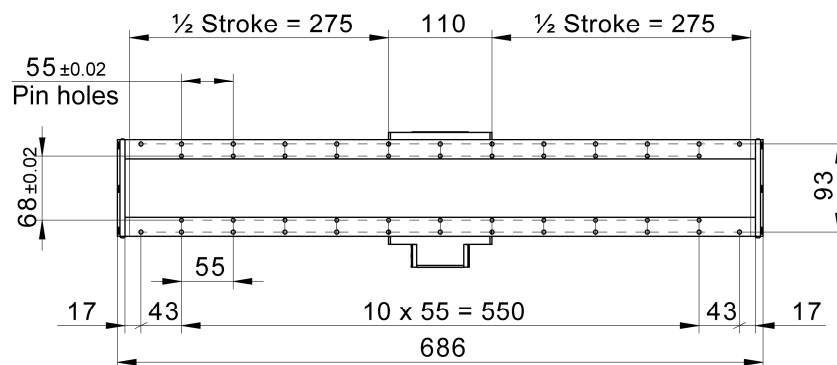

Technical drawing of a long, thin mechanical component, likely a piston rod or connecting rod, showing dimensions and stroke markings.

Dimensions and markings:

- Overall length: 936
- Stroke markings: $\frac{1}{2}$ Stroke = 400 (twice), 110 (center)
- Pin holes: 55 ± 0.02
- Pin hole spacing: 68 ± 0.02
- Pin hole diameter: 20
- Pin hole offset: 55
- Pin hole pattern: 16 x 55 = 880
- Pin hole offset from end: 93

Technical drawing of a plate with the following dimensions and features:

- Overall length: 1136
- Overall width: 93
- Stroke markings: $\frac{1}{2}$ Stroke = 500 (indicated at both ends)
- Pin holes: 55 ± 0.02 (indicated at the left end)
- End dimensions: 17 (outer edge), 48 (inner edge)
- Internal dimensions: 110 (top), 55 (bottom), 18 x 55 = 990 (center)

7 Weight Compensation

In case of power interruption the motor of the LINAX® linear motors becomes powerless. If the axis is mounted vertically, the slider falls downwards. The optional available weight compensation can prevent this. If the XENAX® Xvi Servo Controller is connected and the logic power remains under power (e.g. emergency stop) the coils are shorted. The linear motor which acts as generator brakes the drive. The weight compensation will avoid that the slider is moving constantly downwards.

When compared to a simple brake, a further great advantage of the weight compensation is the relief of the vertical linear motor. With the weight compensation the motor operates weightlessly and heats much less. This savings in energy can be re-used for higher dynamics.

7.1 Weight Compensation STEP CAD Data

CAD drawings can be downloaded as .STEP files from <http://www.jennyscience.ch>.

7.2 Weight Compensation Lxc 44F08

The weight compensation for the compact Lxc 44F08 linear motor axis is available in the version with spring force and with compressed air.

The weight compensation with spring force can be equipped with 4 different springs for external payloads of **0-200g, 200-400g, 400-600g and 600-900g**.



7.3 Weight Compensation Lxc 85F10,


Lxc 80F40, Lxc 176F40

The weight compensation is mounted on the right side and is based on air pressure while there is no air consumption. With a customary air pressure regulator e.g. Festo “VRPA” the compensation force can be adjusted until the weight of the slider and the payload are fully compensated. If there is power interruption the slider remains in position or moves slowly upward depending on the adjustment of the air pressure regulator. The weight compensation for the Lxc 85F10 can also be mounted on the right side.




7.4 Weight Compensation Lxu 40F60, Lxu 80F60, Lxu 160F60


This weight compensation for the Lxu axis is also based on air pressure, while there is no air consumption. The air connection of weight compensation is located on the connector case to save room and to keep cables one-sided. With a customary air pressure regulator e.g. Festo "VRPA" the compensation force can be adjusted until the slider holds position or moves upwards in case of power interruption.

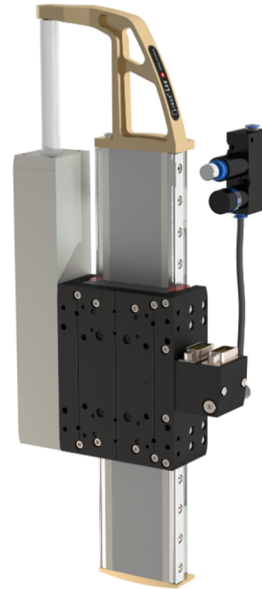

Effective direction of weight compensation with moving ground plate.

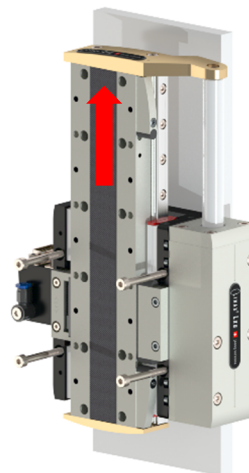


Effective direction of the weight compensation with moving the slide.

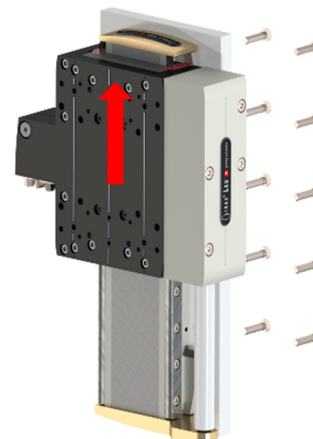


7.5 Weight Compensation LxS F120


The vertical weight compensation for the Lxs F120 for lengths of 80 and 200 mm can compensate for a maximum weight of 12 kg at 6 bar. Using a standard pressure regulator, e.g. Festo "VRPA", the compensation force can now be adjusted so that the carriage remains in position or slowly moves upwards to the stop in the event of a power failure.

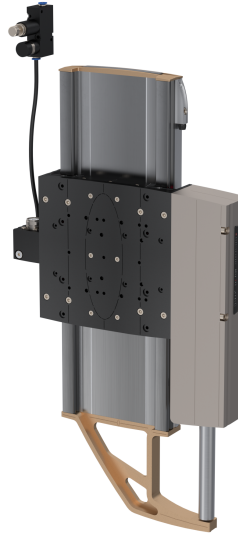

Effective direction of weight compensation with moving ground plate.

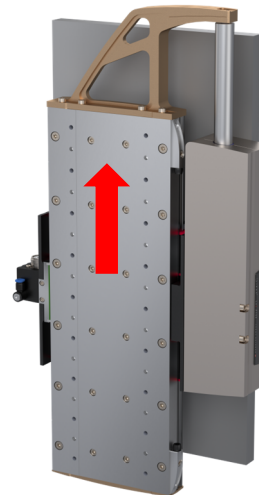


Effective direction of the weight compensation with moving the slide.

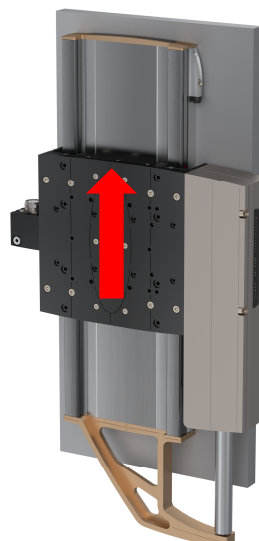


8 Front Flange Connections LINAX® Lxu


There can be mounted a further Lxu or a Lxc linear motor axis on the front of the LINAX® Lxu. If the front plate is removed, the front flange Lxu can be mounted with 4 screws and 2 centering pins. These front flanges can be rotated, mounted and centred in a 90° pattern (except from ELAX®).




Lxu-Lxc F08/F10







Lxu-Lxu
Lxu-Lxc F40



Lxu-Elax flat




Lxu-Elax upright

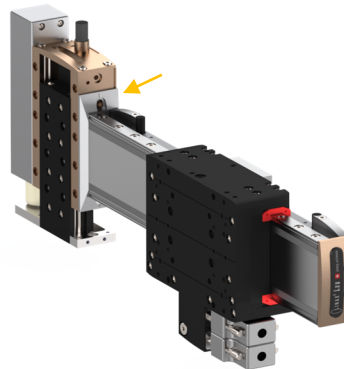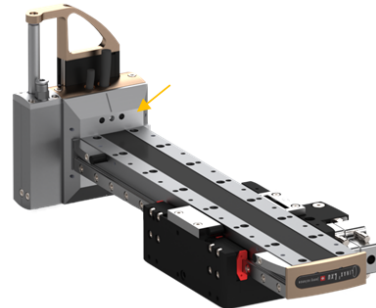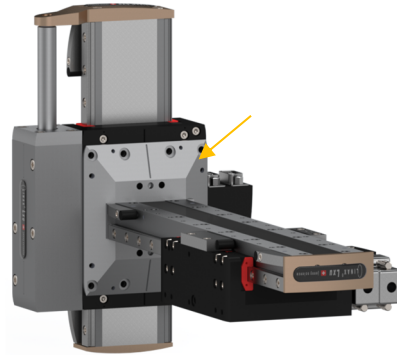

9 Installation, Important Instructions


9.1 Flatness for Mounting on Ground Plate

If the LINAX® linear motor axes are mounted on a ground plate, it has to have a flatness of 0.01mm over a length of 200mm. If the flatness is out of this tolerance, the LINAX® linear motor axis can be distorted when screwed to the ground plate which might cause the guidings to seize. This increases the wear and tear, reduces the lifespan and might even destroy the guiding system

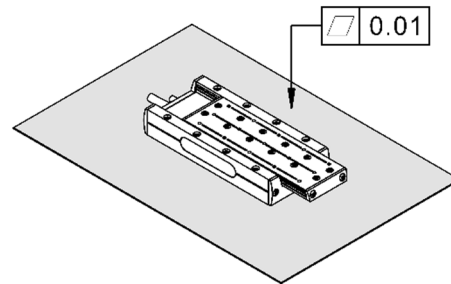

9.2 Flatness for Mounting on Slider

These same conditions hold true for components that are mounted on the slider of the LINAX® linear motor axis. The contact surface has to have a flatness of 0.01mm over a length of 200mm.

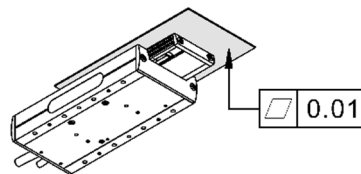

9.3 Flatness Practical Test

Before mounting the ground plate or the slider, please test how smooth the slider can be moved by hand. After tightening the screws, move the slider again by hand. There should not be any noticeable changes in smoothness, otherwise the contact surfaces have to be revised.

9.4 Power Supply


The typical POWER supply is 24V DC. For the stronger LINAX® F40 / F60 axes with high masses (>2kg) or high dynamics (>1.5m/s) a POWER supply of 48V or 72V DC is applicable. The current consumption per axis can be up to 8A and 18A peak per axis. Depending on mass in motion, profile and power supply voltage.

For a fuse protection of the power supply it must be considered that a short peak current of 8A can be reached for the rotating field adjustment.

For a detailed calculation of the required power supply in your application, please contact our support <https://www.jennyscience.ch/en/contact>.

| LINAX® TYP | I _{COMMUTATION} [A] | I _{MAX} [A] |
|------------------|------------------------------|----------------------|
| LINAX® Lxc F08 | 6.1 | 7.0 |
| LINAX® Lxc F10 | 5.5 | 9.2 |
| LINAX® Lxc/e F40 | 6.0 | 10.9 |
| LINAX® Lxs/u F60 | 8.0 | 15.7 |
| LINAX® Lxs F120 | 8.0 | 18.0 |

9.5 Earthing concept

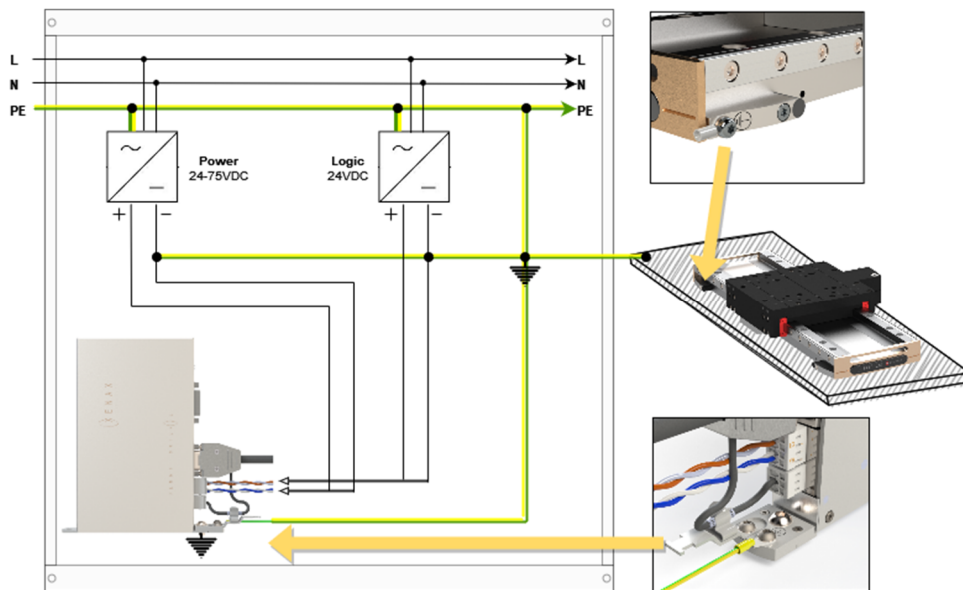

Important

- The **0 volt** connection of the logic supply (pin 1) and the 0 volt connection of the power supply (pin 3) have to be connected to the ground/chassis star point of the switch cabinet.
- The **base plate** of the Lxs/Lxu motors must be connected to the GND/chassis star point of the switch cabinet.
 - The **XENAX® servo controller** must be screwed onto a conductive background, which is connected to the GND/chassis star point of the switch cabinet. The motor cable must be connected to the shield clamp.

Note

If the Lxs/Lxu is mounted on a non-conductive base plate (e.g. granite), the protective earth must be connected directly to the motor.



10 Maintenance, Lifespan

10.1 Lubrication of LINAX® Lxc Types

The initial lubrication through Jenny Science prior to delivery should be sufficient for multiple years, depending on the operational demands of the linear motor. The LINAX® Lxc series with cross roll cages are force centered through gear pinions and gear rods. The lubrication intervals depend on multiple parameters, such as operational demands, dynamics, operational temperature, pollution etc. Preventively we suggest to lubricate the bearing rails every 12 months. For this we recommend the dosage pistol incl. Lubricating cartridge.




155.00.10 Dosage pistol for lubrication

155.00.11 Cartridge with standard lubricant

10.2 Lifespan Expectations LINAX® Lxc Types

The LINAX® linear motor axes operate without wear and tear and without loss in accuracy over time. Generally speaking the mechanical guiding system is the determining factor for life span. The LINAX® Lxc linear motor axes have cross roll guides with the favourable linear support. These types of guides are precise, robust and low-maintenance. The LINAX® Lxc cross roll guiding cages are centered with racks and pinions. According to our experiences a lifespan of over 350Mio cycles can be achieved at medium strain, good maintenance and without external dirt particles.

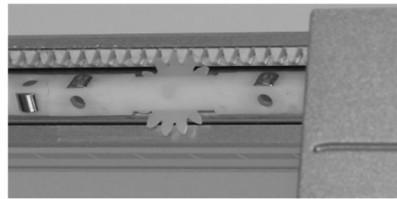

10.3 Lubrication of LINAX® Lxu, Lxs, Lxe Types


For the Lxu, Lxs and Lxe types we use ball bearing guides with integrated permanent lubrication.

For the older LINAX® models re-lubrication was completed with a lubricant filled syringe in order to refill the internal lubrication reservoir. Depending on dynamics the re-lubrication was suggested every 12 months.



The most recent used guiding carriages are maintenance free and no re-lubrication is necessary. The reservoir at the inside of the carriages lubricates all the balls automatically. Even for short-stroke applications lubrication is ensured.

Long term lubrication system integrated!

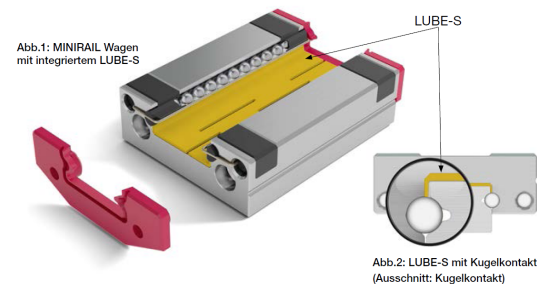

10.4 Lifespan Expectations Lxu, Lxs, Lxe Types

The guiding carriages have an integrated lubrication reservoir as a standard.

We recommend to re-lubricate the guiding system every 5'000km.

Important: If the guiding rails are cleaned, it has to be re-lubricated afterwards otherwise the lubricant in the reservoir might be used up and the guiding rails might run dry.



10.5 Lifespan Extending Measures

- Program trajectories with curve profile instead of trapezoidal profiles (XENAX® servo controller, default S-curve profile = 20%).
- Dynamics should only be as high as necessary.
- Movements which are not cycle time relevant can be executed slower.
- Prevent that dirt particles get into guiding rails and guiding carriages.
- Clean and lubricate guiding beams every 12 months.

10.6 Cleaning Glass Scale

After mechanical mounting or if there is visible dirt, the glass scale should be cleaned thoroughly. Please do not touch glass scale afterwards.

If there is error „54, LINAX® measuring head signal too weak“ the glass scale is contaminated and signal errors might occur. Use cotton swab or lint-free cloth with thin fluid and de-greasing detergent. E.g. cleaning alcohol from drugstore or pharmacy.

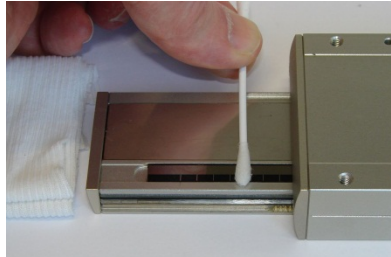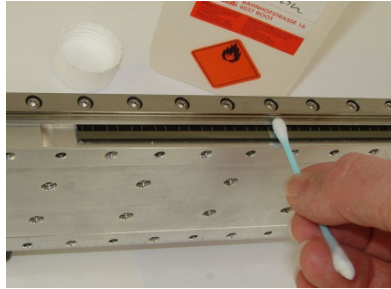

11 Safety, Environment

11.1 Safety with XENAX® Servocontroller

| | |
|--|---|
| <p>EN 61000-6-2:2005 Electromagnetic compatibility (EMC), Immunity for industrial environments</p> | <p>EMC Immunity Testing, Industrial Class A</p> |
| <p>EN 61326-3-1 IFA:2012 EN 61326-1, EN 61800-3, EN 50370-1</p> | <p>Immunity for Functional Safety Functional safety of power drive systems Electrostatic discharges ESD, Electromagnetic Fields, Fast electric transients Bursts, radio frequency common mode</p> |
| <p>EN 61000-6-3:2001 Electromagnetic compatibility (EMC), Emission standard for residential, commercial and light-industrial environments</p> | <p>EMC Emissions Testing, Residential Class B</p> |
| <p>EN 61326-1, EN61800-3, EN50370-1 IFA:2012</p> | <p>Radiated EM Field, Interference voltage Functional safety of power drive systems</p> |

11.2 Environment Conditions

| | |
|------------------------------|---|
| <p>Storage and transport</p> | <p>No storage outside. Storage rooms have to be well-ventilated and dry. Storage temperature from -25°C bis +55°C</p> |
| <p>Operating temperature</p> | <p>5°C -50°C environment, after 40°C performance reduction</p> |
| <p>Operating humidity</p> | <p>10-90% non-condensing</p> |
| <p>Cooling</p> | <p>No external cooling needed. Dynamics can possibly be increased by mounting the slider case on a thermoconductive ground plate.</p> |
| <p>Protection</p> | <p>IP 40</p> |

MRL 2006/42/EC notes

- Danger for persons with medical Implants due to magnetic fields



- Surfaces may become hot, up to 85°C



- Lubrication only with non-toxic lubricants, verify safety data sheet
- Noise level up to 70 dB(A)

Copyright, Disclaimer

This data sheet contains proprietary information protected by copyright. All rights are reserved. This document may not be photocopied, reproduced or translated in whole or in part without the prior agreement of Jenny Science AG.

Jenny Science AG can neither guarantee nor be made responsible for any consequences resulting from incorrect information.

These manual is subject to change without notice.

Jenny Science AG
Sandblatte 11
CH-6026 Rain, Switzerland

Tel +41 (0) 41 255 25 25

www.jennyscience.ch
alois.jenny@jennyscience.ch

© Copyright Jenny Science AG 2025